

RISH DPM 48x96 A, B, C, F, AC, T

Features:

- Multi-range versions
- DC or AC, Voltage or Current ranges
- Pt 100 temperature version
- Scaling adjustable over a wide range

Highly adaptable DPMs suitable for a wide range of measuring applications.

Versions available for current or voltage inputs (DC and AC), or Pt 100 temperature sensors.

The chosen input range is user adjustable, from 10% to 100% of the full-scale value, for simple adaptation of the digital readout to the input value.

For example, the AC version can be scaled for standard 5A secondary current transformers.

96mm x 48mm DIN-standard housings.

Applications:

The digital panel meter **RISH DPM 48 x 96** have been designed for industrial applications, which frequently require precise, on-site adjustment of the display range.

It can be used in industrial automation and for laboratory uses.

It provides cost-effective solution for virtually all switchboard instruments.

Specifications:

Display	Display range	: 1999
	Decimal point position	: selectable by rear jumper position
	Negative display indication	: "-"
	Digit height	: 14 mm / 7-segment digits
	Overload indication	: Last 3 digits blank



Description

RISH DPM 48 x 96

A	Current measurement, 3 ranges
B	Current measurement, 2 ranges
C	Voltage measurement, 2 ranges
AC	Voltage and Current measurement (AC), 3 ranges
F	Voltage measurement, 4 ranges
T	Temperature measurement with Pt100, 2 ranges

4 ranges for power supply are available

Applicable Regulations and Standards

Protection class	IP 20 to IEC EN 60 529
front	IP 50 (IP 54 on request)
Climatic class	Class 2 VDE/DIN 3540
Safety class	II to IEC 348 / VDE 0411
Device safety	to IEC EN 61 010
EMC immunity	DIN EN 61 000-4-1 to 4
EMC radiated interference	DIN EN 50 081 class B



RISH DPM 48x96 A, B, C, F, AC, T

Specifications:

Measuring ranges

[Max. Overload 20% of full-scale range value]

Version	A	B	C	F	AC	T
					[50...60 Hz]	°C or °F
Voltage				0...2 V	0...500 V	
Input current < 300 µA			0...75 mV	0...20 V		
			0...150 mV	0...200 V		
				0...500 V		
Current	0...20 mA	0...20 mA			0...1 A	
Voltage drop < 600 mV	0...2 mA	4...20 mA			0...5 A	
	0...200 mA					
Pt 100 sensors						-100...850 °C
						-199.9...199.9 °C
						2-, 3- or 4- wire
Range selection by	Input choice	Input choice	Input choice	Input choice	DIP switch/ Input choice	DIP switch

Accuracy :

Versions A, B, C:

Measuring Accuracy DC < 0.1% + 1 digit
 Temperature coefficient 100 ppm/ °C, plus
 Zero point drift 100 ppm/ °C
 Range adjustment span from 10% to 100% of range

Versions F :

Measuring Accuracy DC < 0.2% + 1 digit
 Temperature coefficient 100 ppm/ °C, plus
 Zero point drift 100 ppm/ °C
 Range adjustment span from 10% to 100% of range

Versions AC :

Measuring Accuracy Voltage (Input current < 500mA) < 0.5% + 1 digit
 Measuring Accuracy Current (Voltage drop < 600mV) < 0.5% + 1 digit
 Temperature coefficient 100 ppm/ °C, plus
 Zero point drift 200 ppm/ °C
 Range adjustment span from 10% to 100% of range

Versions T :

Measuring Accuracy DC < 0.2% + 1 digit
 Temperature coefficient 100 ppm/ °C, plus
 Zero point drift 100 ppm/ °C
 Range adjustment span ± 5%
 Max. Allowable line resistance
 2L 10 Ω
 3L < 50 Ω
 4L < 50 Ω

Digital input

HOLD [optional] "0" (not available for Versions AC, or T)



RISHABH
INSTRUMENTS
 Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.

F-31, MIDC, Satpur, Nashik-422 007, India.

Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064

E-mail : India :- marketing@rishabh.co.in

International :- exp.marketing@rishabh.co.in


www.rishabh.co.in

RISH DPM 48x96 A, B, C, F, AC, T

Specifications:

Power supply	Direct voltage DC	24V + 15%	4W approx.
	Alternating voltage AC	24V + 10% -15%	4W approx.
Ambient conditions	Operating temperature	0 ... 50 °C	
	Storage temperature	-40 ... 80 °C	
Dimensions and Weights	Bezel size	96 mm x 48 mm DIN 43 718	
	Panel cut-out	92 ^{+0.8} mm x 43.5 ^{+0.6} mm	
Sundry	Overall depth	138 mm	
	Weight	500 g. approx.	
	Connections	plug-in screw terminal block	

Design and installation

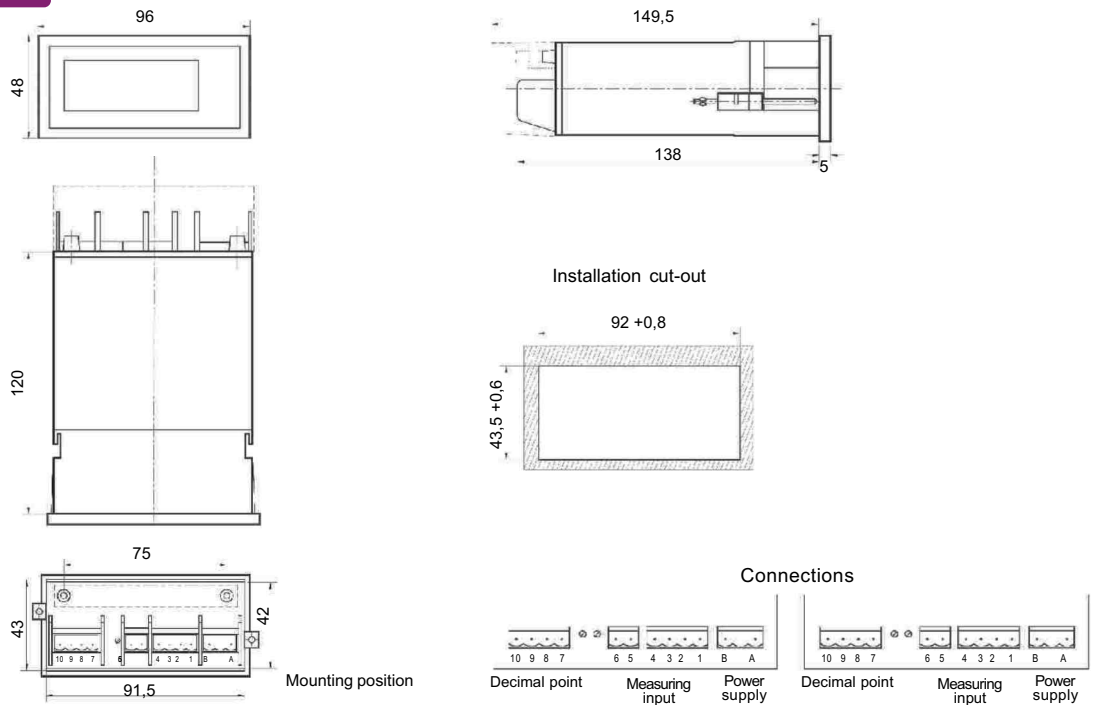

Order Details:

Example

Type	RISH DPM 48x96 AC
Measuring input	0... 1 A
Display	0... 1000
Display caption	
Options	A
Supply Voltage	24 V DC



RISHABH
INSTRUMENTS
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.
F-31, MIDC, Satpur, Nashik-422 007, India.
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064
E-mail : India :- marketing@rishabh.co.in
International :- exp.marketing@rishabh.co.in
www.rishabh.co.in