

# PD51 - CONVERTER OF RS-232/RS-485 INTERFACES



## FEATURES:

2 x  
1200m



CE

- Exchange of the RS-232 interface into industrial RS-485 interface
- Enables the bus range and the number of devices increase in the RS-485 network
- Ensures the automatic control of the data flow direction
- In order to protect devices at both sides of interfaces, a galvanic separation is applied in the converter.


## INPUTS:

RS  
232



## OUTPUTS:

RS  
485

## GALVANIC ISOLATION:



## EXAMPLE OF APPLICATION

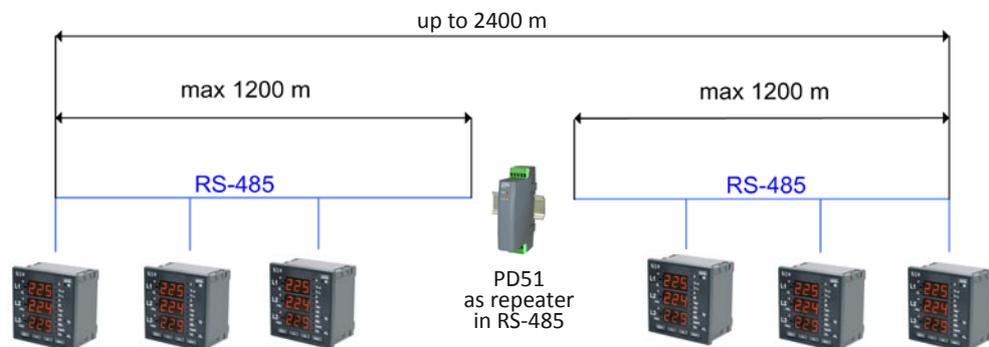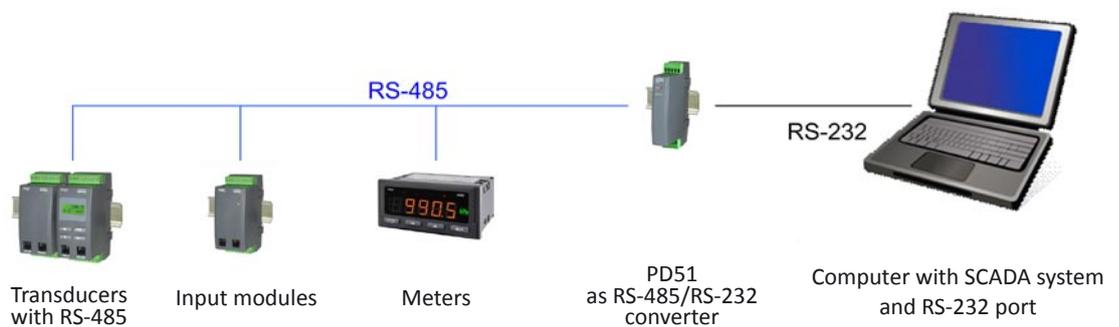

## DIGITAL INTERFACE

Interface type	Properties	
RS-485/RS-232	Transmission rate:	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 Mb/s
	Steering of the data flow direction:	automatic
	Working mode:	converter or repeater

## EXTERNAL FEATURES

Overall dimensions	52 x 44 x 24 mm	
Weight	0.1 kg	with packing
Protection grade	Housing: IP40	from terminal side: IP20
Fixing	On a rail	

### Contact Details :

Rishabh Instruments Pvt. Ltd.  
F-31, MIDC, Satpur  
Nasik - 422007  
INDIA

Phone: +91 253 2202028

Exp.marketing@rishabh.co.in  
marketing@rishabh.co.in

www.rishabh.co.in


## RATED OPERATING CONDITIONS

Supply voltage	7...35 V d.c. or 20...24...40 V a.c./d.c. or 85...230...253 V a.c./d.c.	Input power: $\leq 1.5$ Va Supply frequency: 40...50...440 Hz
Temperature	Ambient: 0...23...55°C	Storage: 0...70 °C
Relative humidity	< 85%	
Operating position	any	
External magnetic field	400 A/m	
Admissible sinusoidal vibrations	Frequency: 10..150 Hz	Shift amplitude: $\leq 0.35$ mm

## SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	Noise immunity	acc. to EN 61000-6-2
	Fastness against supply decays	acc. to EN 61000-6-2
	Emission of radio electric perturbations	acc. to EN 61000-6-4
Pollution level	2	acc. to EN 61010-6-1
Installation category	III	
Maximum phase-to-earth operating voltage	For supply circuits: 300 V, For other circuits: 50 V	

## CONNECTION DIAGRAMS

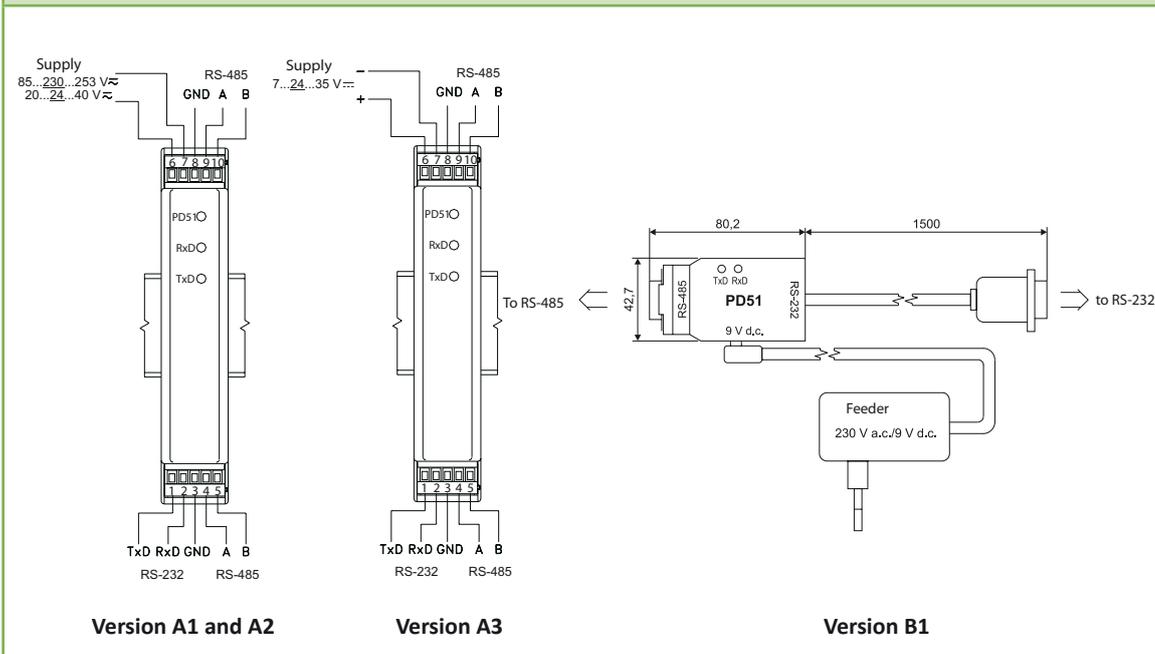

## SEE ALSO:



Input and output modules of SM series



PD8 - converter of RS-485/Ethernet interfaces



MR03 - radio transmission module

our products

[www.rishabh.co.in](http://www.rishabh.co.in)

For more information about Rishabh products please visit our website:  
[www.rishabh.co.in](http://www.rishabh.co.in)

**Contact Details :**  
Rishabh Instruments Pvt. Ltd.  
F-31, MIDC, Satpur  
Nasik - 422007  
INDIA

Phone: +91 253 2202028

Exp.marketing@rishabh.co.in  
marketing@rishabh.co.in

[www.rishabh.co.in](http://www.rishabh.co.in)

ORDERING			
Converter of RS-232/RS-485 interfaces	XX	XX	X
<b>Supply voltage:</b>			
on-rail version: 85...230...253 V a.c./d.c.	A1		
20...24...40 V a.c./d.c.	A2		
7...24...35 V d.c.	A3		
portable version 9 V d.c.	B1		
<b>Version:</b>			
standard		00	
custome - made *		XX	
<b>Acceptance tests:</b>			
without additional requirements			8
with an extra quality inspection certificate			7
acc.to customer's request *			X

\* after agreeing with the manufacturer

## Ordering example:

The code: PD51 - A1 00 7 means:

PD51 - Converter of PD51 type

A1 - supply voltage: 85...230...253 V a.c./d.c.

00 - standard version

7 - with an extra quality inspection certificate