



Data Sheet

RISH EM DC 6001 / 6002

Multi channel DC Energy Meter



Measure



Control



Record



Analyze



Optimize

Applications

- Solar Photovoltaic Systems
- Battery chargers and systems
- Wind Power Generation
- Electroplating Industries
- Power Distribution for Telecommunication
- Industrial DC control Systems

Possible Applications of Relay Outputs

- Alarming via lamp or horn
- Load shedding
- Remote controlling

Product Features

Multi-Channel Support

Single meter measures energy consumption of four independent loads connected to one Voltage source

Bi-Directional Voltage & Current measurement

The meter has a unique feature of measuring both charging and discharging current

Isolated Voltage Channel

The Voltage channel is galvanically isolated from rest of the circuitry

Event Logging

Previous 5 Events of factory-default parameters can be logged with Date and Time stamp

Data Logging

- User Selectable parameters (1 to 30) can be logged at regular intervals (1 to 60 min) with Date & Time stamp in internal memory and can be accessed via Modbus
- Max Records can vary from 8532 to 91010 depending upon number of selected parameters

Load Profile Analysis

- Logging of Energy consumed and Peak Demand (Power & Current) in a day and in a month for efficient tracking of load behaviour
- Daily Data is available for last 1 year and Monthly Data is available for last 14 years

Direct Remote Access (optional)

- Remote configuration of the Instrument and access of measured parameters via MODBUS
- Programmable baud rates up to 57.6kbps

4 - line 8 digit Ultra-bright LED Display

4 - line LED display provides easily readable data on meter front with a display range of 99999999

Reverse Locking

- Energy and Ampere Hour accumulation can be blocked for Reverse Power and Current resp
- Reverse condition can be set as Import or Export

Onsite Configuration

Configuration can be done via Front Keys, USB Serial Interface or RS485 (MODBUS)

Relay Functions

- Limit Switch - For protection against over-shoot or undershoot of any selected parameter
- Pulse Output - To drive an external counter for energy measurement
- Timer - Cyclic ON-OFF operation of relay for user-defined cycles with programmable ON-OFF Delays
- Remote Operation - Relays can be activated remotely via MODBUS
- Reverse Locking Alarm
- RTC Relay - Relay can be activated & deactivated at predefined ON & OFF Time on any or all Days of Week

Enclosure Protection for dust and water

Conforms to IP 54 (front face) as per IEC60529

Compliance to International Safety standards

Compliance to International Safety standard IEC 61010 - 1 - 2010

EMC Compatibility

Compliance to International standard IEC 61326 - 2012



Measure



Control



Record




Analyze




Optimize


Dimensions Details



Front View

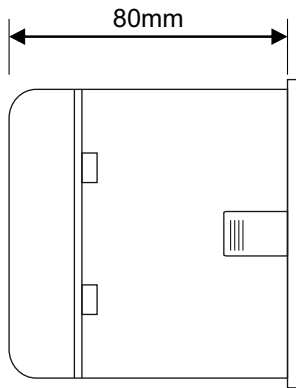

Side View



Panel Cutout

Technical Specifications

Input Voltage

Nominal Input Voltage Range	10 ~ 60 VDC, 61 ~ 200 VDC, 201 ~ 1000 VDC
Max continuous input voltage	125% of nominal value

Input Current

No of Channels	4
Current Sensor	External Shunt
Shunt Setting Range	50 ~ 150 mV
Full Scale Setting Range	1 A to 20 kA
Max continuous input current	125% of nominal value

Operating Measuring Range

Voltage	± 2 to $\pm 125\%$ of nominal value
Current	± 0.2 to $\pm 125\%$ of nominal value

Auxiliary Supply

Higher Aux	60 V – 300 V AC-DC, 45 to 65 Hz range
Lower Aux	12 V – 70 V DC
Nominal Value	230 V AC-DC, 50/60 Hz for Higher Aux 24 V AC-DC for Lower Aux

VA Burden

Nominal input voltage burden	< 0.4 W approx.
Nominal input current burden	< 0.1 W approx. per channel
Auxiliary Supply burden	< 6 VA approx.

Accuracy

Reference Conditions	23°C +/- 2°C
Voltage	$\pm 0.5\%$ of Nominal value (± 20 to $\pm 120\%$)
Current	$\pm 0.5\%$ of Nominal value (± 5 to $\pm 120\%$)
Power	$\pm 0.5\%$ of Nominal value (± 5 to $\pm 120\%$)
Energy	Class 1
Temperature Drift	0.1%/°C

Display

Type	4 line 8-digit LED Display
Display Height	9 mm
Overload Indication	-oL- (Above 126% of nominal value)

Display Range

Voltage	0 to ± 9999
Current	0 to ± 9999
Power	0 to ± 9999
Energy (Import & Export)	0 to 99999999

Relay Output

Max Load Voltage	250 VAC / 30 VDC
Max Load Current	5 A



Measure



Control



Record




Analyze




Optimize

Installation

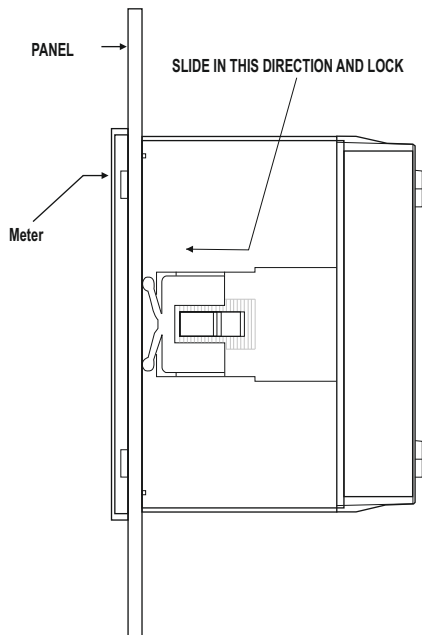

Electrical Connections

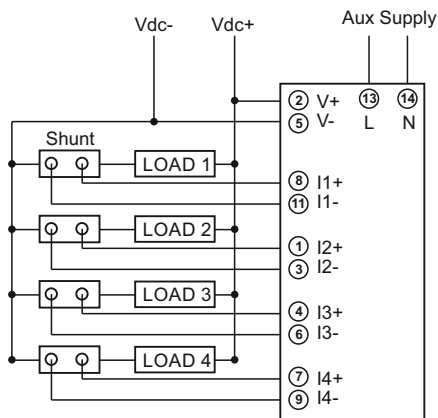

It is recommended that the wires used for connections to the instrument should have lugs soldered at the end. That is, the connections should be made with Lugged wires for secure connections. The Maximum diameter of the lug should be 7.0 mm and maximum thickness 3.5mm.
Permissible cross section of the connections wires: $\leq 4.0\text{mm}^2$ single wire or $2 \times 2.5\text{mm}^2$ fine wire

Technical Specifications:

Real Time Clock (RTC)

Uncertainty ± 2 minutes / month ($23^\circ\text{C} \pm 2^\circ\text{C}$)

NOTE: Variation due to influence Quantity is 100% of class index

Optional RS485 Communication

Protocol Modbus-RTU
Baud rate 4800, 9600, 19200, 38400, 57600 bps
Distance 1200 m

Overload Withstand

Voltage 2 x rated value for 1 second, repeated 10 times at 10 second intervals
Current 20x rated value for 1 second, repeated 5 times at 5 min intervals

Applicable Standards

EMC IEC 61326-2012
Immunity IEC 61000-4-3. 10V/m min – Level 3 industrial Low level
Safety IEC 61010-1-2010 , Permanently connected use
IP for water & dust IEC 60529 (IP 54)
Pollution degree 2
Installation category 1000V CATII, 600V CATIII (Measuring Inputs)
300V CATIII (Power Supply)
Protective Class 2
High Voltage Test (DC, 1 minute)

- 6.22 kV DC, Enclosure versus all electrical circuits
- 5.23 kV DC, Auxiliary Supply versus all other electrical circuits
- 3.11 kV DC, Measuring Terminals versus all other electrical circuits
- 3.11 kV DC, Relay versus Relay
- 3.11 kV DC, USB & RS485 versus all other electrical circuits
- 3.11 kV DC, Voltage versus Current

(Optional)

Environmental

Operating temperature -10 to $+55^\circ\text{C}$
Storage temperature -20 to $+70^\circ\text{C}$
Relative humidity 0... 90% non condensing
Warm up time Minimum 3 minute
Shock 15g in 3 planes
Vibration 10... 55...10 Hz, 0.15mm amplitude
Number of Sweep Cycles 10 per axis

Enclosure

Dimensions & Weight

Bezel Size 96 mm x 96 mm DIN 43718
Panel Cut-out 92 ± 0.8 mm x 92 ± 0.8 mm
Overall Depth 80 mm
Weight 620 gm. approx.



Measure



Control



Record



Analyze



Optimize

Measured Parameters

Sr No	Parameters	Sr No	Parameters
1	Voltage	41	Max Import and Export Power Demand channel 1
2	Current channel 1	42	Max Import and Export Power Demand channel 2
3	Current channel 2	43	Max Import and Export Power Demand channel 3
4	Current channel 3	44	Max Import and Export Power Demand channel 4
5	Current channel 4	45	Max Import and Export Current Demand channel 1
6	Total Import & Export Power	46	Max Import and Export Current Demand channel 2
7	Power channel 1	47	Max Import and Export Current Demand channel 3
8	Power channel 2	48	Max Import and Export Current Demand channel 4
9	Power channel 3	49	Number of Interruptions
10	Power channel 4	50	Old Import and Export Energy channel 1
11	Total Import & Export Energy	51	Old Import and Export Energy channel 2
12	Import and Export Energy channel 1	52	Old Import and Export Energy channel 3
13	Import and Export Energy channel 2	53	Old Import and Export Energy channel 4
14	Import and Export Energy channel 3	54	Old Import and Export Ampere Hour channel 1
15	Import and Export Energy channel 4	55	Old Import and Export Ampere Hour channel 2
16	Total Import & Export Ampere Hour	56	Old Import and Export Ampere Hour channel 3
17	Import and Export Ampere Hour channel 1	57	Old Import and Export Ampere Hour channel 4
18	Import and Export Ampere Hour channel 2	58	Old Max Import and Export Power Demand channel 1
19	Import and Export Ampere Hour channel 3	59	Old Max Import and Export Power Demand channel 2
20	Import and Export Ampere Hour channel 4	60	Old Max Import and Export Power Demand channel 3
21	Total Import & Export Power Demand	61	Old Max Import and Export Power Demand channel 4
22	Import and Export Power Demand channel 1	62	Old Max Import and Export Current Demand channel 1
23	Import and Export Power Demand channel 2	63	Old Max Import and Export Current Demand channel 2
24	Import and Export Power Demand channel 3	64	Old Max Import and Export Current Demand channel 3
25	Import and Export Power Demand channel 4	65	Old Max Import and Export Current Demand channel 4
26	Total Import & Export Current Demand	66	Old On Hour
27	Import and Export CurrentDemand channel 1	67	Old Run Hour channel 1
28	Import and Export CurrentDemand channel 2	68	Old Run Hour channel 2
29	Import and Export CurrentDemand channel 3	69	Old Run Hour channel 3
30	Import and Export CurrentDemand channel 4	70	Old Run Hour channel 4
31	On Hour	71	Old Number of Interruptions
32	Run Hour channel 1		
33	Run Hour channel 2		
34	Run Hour channel 3		
35	Run Hour channel 4		
36	Max and Min Voltage		
37	Max and Min Current channel 1		
38	Max and Min Current channel 2		
39	Max and Min Current channel 3		
40	Max and Min Current channel 4		



Measure



Control



Record



Analyze



Optimize

Ordering Information

Ordering Information	EM93-	X	XX	X	X	X	1	000000
Product Type	RISH EM DC 6001 - Basic Model (without USB, RTC & Datalogging)	Z						
Multi Channel DC Energy Meter	RISH EMDC 6002 - Higher Model (with USB, RTC & Datalogging)	A						
Input voltage range	10 - 60 V		V1					
	61 - 200 V		V2					
	201 - 1000 V		V3					
Auxiliary Supply	60 - 300V AC / DC			H				
	20 - 70V DC			L				
RS485 Communication	With RS485 communication				R			
	Without RS485 communication				Z			
Relay Output Option	NONE					Z		
	2 RELAY					2		
	4 RELAY					4		

Order Code Example : EM93-AV3LR41000000

RISH EM DC 6002 - Multi-Channel DC Energy Meter : Input 201-1000V DC, Aux 12-70V DC, With RS485 + 4 RELAY, With Datalogging



Measure



Control



Record



Analyze



Optimize



Specifications may change without prior notice



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in
www.rishabh.co.in