

Models available

Function / System	Product Type
3 Setpoints	256-PRA
2 Setpoints	256-PRB
1 Setpoint	256-PRC

Applications

- Motor protection
- Transformer protection
- Gensets protection
- Heating equipments protection
- Ineffective cooling
- Blocked ventilation
- Overloads
- Worn bearings

Features

- Up to three RTD inputs
- 1mA analogue output
- Three adjustable set points
- Internal differential
- LED trip indication
- Automatic reset
- Three single-pole relay contacts

Introduction

The Rishabh temperature trip relay has been designed to monitor three separate temperature zones in large electric motors, transformer winding or any temperature conscious equipment such as process lines gas turbines or engine driven generating sets, using Resistance Temperature Detectors (RTDs). The highest of three temperatures is automatically selected and a 0 to 1 milliamp output signal produced. Yellow LEDs are fitted to show which of three sensors is at the highest temperature. The output signal is compared internally with the voltage from up to three set point potentiometers and the difference fed to trigger relay circuits. Red LEDs are used to indicate relay energised. Single pole changeover relay are provided for each set point. In a typical installation the three set points would be set to trip on increasing temperature, in the following sequence :-

1. Initiate cooling/ reset if effective
2. Bring up alarm/ reset if action and cooling effective
3. Shut down

Specifications

Input : Up to 3 inputs, 2 or 3 wire RTD sensors either 10 Ω Copper or 100 Ω platinum minimum span 100 $^{\circ}$ C

Auxiliary supply

A.C. : 110, 120, 220, 230, 240 V (specify)
+/- 20% 50/60Hz

Burden : 4 VA maximum

Output Relay(s)

Relay differential : Standard 2% of range

Type : SP Changeover

Rating A.C. : 240V, 5A non-inductive

D.C. : 24V, 5A resistive

Operations : 0.2 million at the above loads

Reset : Automatic

Standard : De-energise at set point with rising temperature

Indicator O/P : 1 mA into 0/4k Ω load

Other Specifications

Operating temperature : 0 $^{\circ}$ C to +60 $^{\circ}$ C

Storage temperature : -20 $^{\circ}$ C to +70 $^{\circ}$ C

Temp. co-efficient : 0.05% per $^{\circ}$ C

Interference immunity : Electrical stress surge withstand and non function to ANSI/IEEE C37 90a

Enclosure style : DIN-rail with wall mounting facility

Material : Flame retardant polycarbonate /ABS

Enclosure integrity : IP 50


Model 256 dimensions : 150mm(5.9")wide x 70mm(2.8")H x 112mm (4.4") deep

Weight : Approximately 1.4Kg

Options


1. An extra 4 terminals can be fitted for remote indication.
2. Relay energising at the set points (rising temperature)

Connection diagram

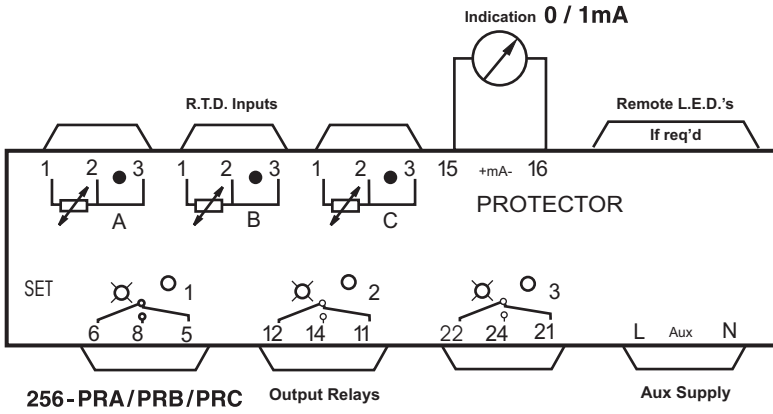

Dimensions

Model 256

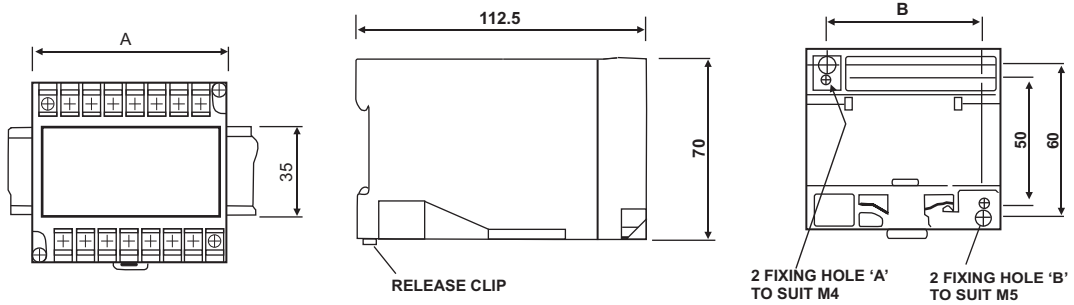

Model	A	B
256	150	135

Ordering Information

Please quote :

1. Product Type.
2. Please specify standard or non standard trip. An energised relay is indicated by a "Lit" red LED. Setpoint can be factory adjusted to your requirements.
3. System Frequency.
4. Auxiliary Voltage where required.
5. Preset Differential where required.
6. On temperature trips quote temperature span and sensor type and set points and trip temperatures.



RISHABH
INSTRUMENTS

Measure, Control & Record with a Difference

RISHABH
INSTRUMENTS

RISHABH INSTRUMENTS PVT.LTD.

F-31, MIDC, Satpur, Nashik-422 007, India.

Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064

E-mail : India :- marketing@rishabh.co.in

International :- exp.marketing@rishabh.co.in

www.rishabh.co.in