

Analogue Maximum Demand Ammeters with Bimetallic Movement, Combined Bimetallic and Moving - Iron Ammeter

BM	48
BM	72
BM	96
EB	72
EB	96

Data Sheet

Analogue
Maximum Demand Ammeters
with Bimetallic Movement,
Combined Bimetallic
and Moving - Iron Ammeter



Application

The maximum demand ammeters BM 48 and BM/EB 72/96 housed in moulded polycarbonate cases, monitor the most economic use of transformer stations & LT distribution feeders by indicating the thermal/time characteristics of the load.

The high torque of the thermal movement drive a red slave pointer linked to the instrument pointer. The slave pointer will remain at the maximum value reached for a subsequent reading until being manually reset by a sealable reset knob to the position of the instrument pointer.

Where the instantaneous and maximum demand currents are required, the EB 72/96 instrument, which combines a thermal bimetallic and a moving - iron movement in the same case mounted diagonally opposite to each other. These instruments are suitable for frequency range of 15-400Hz.

These meters offer several advantages in Switchboard and Generating Set panels. Number of meters can be mounted in a Panel Cut out (Mosaic Mounting). The bezel, glass and dial can be easily replaced.

Features

- Scale Interchangeability.
- Near linear scale for MI scale in EB.
- User accessible reset Knob.
- Knife edge pointers.
- Easily replaceable glass and bezel.

Applicable Standards

Nominal case and cutout dimensions for indicating measuring instruments.	IS 2419 DIN IEC 61554
Scale and pointer for electrical measuring instruments.	IS 1248 DIN 43802
Connections and Terminal markings for panel meters	IS 1248 DIN 43807
Terminal bolts / leads	DIN 46200/46282
Clamp straps for connections.	DIN 46282
Safety requirements for Electrical indicating instruments and their accessories.	IS 9249 DIN 40050 VDE 0110 VDE 0410 IEC 529, IEC 1010
Performance specifications for direct acting indicating analogue electrical measuring instruments & their accessories	IS 1248 IEC 51/DINEN 60051 DIN 43701
Environmental conditions	IS 1248 IS: 9000 VDE / VDI 3540 DIN 43718
Front frames for indicating measuring instruments principle dimensions.	UL 94 V-O
UL Combustibility class.	DIN 43701
Technical conditions of delivery for electrical instruments.	
Mechanical strength (Free fall test, vibration test)	IS 1248, IEC 51, IS 9000 VDE 0411 IEC 61010

Comply with following European directives :
2004 / 108 / EC (EMC directive), 2006 / 95 / EC (low voltage directive) & amendment 93/68/EEC, For CE Marking.

Scale and Pointer

Pointer	Knife - edge pointer
Pointer deflection	0...90°
Over range	Bimetallic Moving - iron 1.2 times 2 times
Scale division	Coarse - fine

Scale length	BM 48 Bimetallic — 38 mm
	EB 72 Bimetallic — 63 mm
	EB 96 Bimetallic — 97 mm
	BM 72 Bimetallic Moving - iron 52 mm 61 mm
	EB 96 Bimetallic Moving - iron 71 mm 97 mm

Mechanical Data

Case details	Moulded square case suitable for mounting in Control / Switchgear panels, Machinery consoles.
Case material	Polycarbonate, flame retardant and drip proof as per UL 94 V-0.
Front facia	Glass
Colour of bezel	Black
Panel fixing	Position of use Vertical
Mounting	Mounting Clamp.
Panel thickness	Stackable in a single cutout ≤ 25 mm
Terminals	Hexagon studs, M4 screws and wire clamps E3

Electrical Data

Measuring quantity	AC currents
Thermal time delay (blimetalic)	15 minutes (8, 20, 30 min on request)

Response time (moving iron) < 4 sec

Power consumption	BM	EB
1 A rated current	< 1.6 VA	< 2.5 VA
5 A rated current	< 2.5 VA	< 3.4 VA

Overload capacity (acc to IS 1248 / IEC 51)

Continuously	1.2 times rated current
Short duration	10 times for 0.5 sec : 9 overloads 10 times for 5 sec : 1 overload

Enclosure code (IEC 529)	IP 52 case IP 00 for terminals without backcover IP 20 for terminals with backcover
Insulation class	Group A according to VDE 0110
Rated insulation voltage	660V
Proof voltage testing	3 kV
Installation category (IEC 1010)	300V CAT III

Insulation resistance	> 50 Mohm at 500V DC
-----------------------	----------------------

Accuracy at Reference Conditions

Accuracy class acc to IS : 1248/ IEC 51/DIN EN 60051	3 (bimetallic movement referred to slave pointer) 1.5 (moving - iron movement)
--	---

Reference conditions

Ambient temperature	23 °C ± 2 °C
Position of use	Nominal position ± 1°
Input	Rated value of current
Frequency	45...65 Hz
Other conditions	As per IS:1248 (IEC 51/ DIN EN 60051)

Nominal range of use

Ambient temperature	0 ... 50 °C
Position of use	Nominal position ± 5°
External magnetic field	At 0.4 kA/m
Frequency	40...65Hz.

Standard Measuring Ranges

Bimetallic	Moving - Iron	For use on CT
1 A	1 A	----/ 1 A
5 A	5 A	----/ 5 A

Over range

Moving Iron	2 times rated current
Bimetal movement	1.2 times rated current
Moving iron & bimetal	1.2 times rated current
Non-Standard ranges available on request.	

Environmental Conditions

Climatic suitability	Climatic class 3 according to VDE/VDI 3540
Operating temperature	-10 ... + 55 °C
Storage temperature	-25 ... + 65 °C
Relative humidity	≤ 75% annual average, non-condensing
Shock resistance	15g _n for pulse duration 11 ms
Vibration resistance	10-55-10Hz for ampli. 0.15mm (1.5 g at 50Hz)
Pollution degree	2

Options

Case

Front facia	Antiglare glass
Colour of bezel	Black
Position of use	on request 0°180°

Dial

Blank dial	With initial and end values marked.
Special markings	Numbering /Lettering.
Division dials	Basic divisions without numbering.
Colour markings/bands	Red or green.

Other


Calibration	For other frequencies 15Hz...400 Hz.
Thermal time delay	8 min / 20 min / 30 min

Accessories

Safety Terminal Protection

Full sized polycarbonat back cover, to provide protection against accidental contact (hand and fingers)

Dimensions

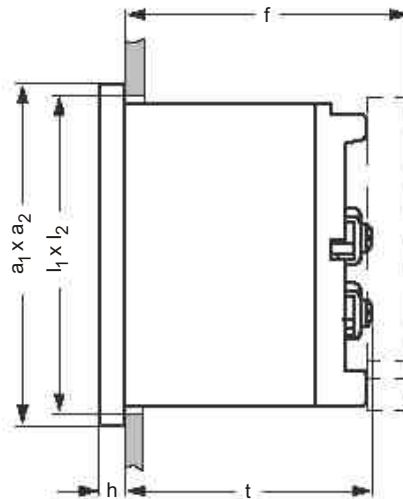

Front in mm	Nominal Dimensions, mm		Cutout, mm l ₁ x l ₂	Installation Depth Including Terminal (t), mm	Installation Depth Incl. Full back Cover (f), mm
	a ₁ x a ₂	h			
48 x 48	48 x 48	5.5	45 ^{+0.6} x 45 ^{+0.6}	51	54
72 x 72	72 x 72	5.5	68 ^{+0.7} x 68 ^{+0.7}	54	62.5
96 x 96	96 x 96	5.5	92 ^{+0.8} x 92 ^{+0.8}	54	62.5

Functional Principle

The thermal bimetallic movement indicates the mean rms value over 15 minutes (optional 8 min, 20 min & 30 min.) and deflects a resettable red slave pointer which shows the maximum value reached.


Bimetallic instruments have a specific inertia due to their thermal time lag making these instruments especially suitable to indicate maximum demands or to control long - lasting peak loads.

For the measurement of instantaneous rms values, moving - iron movement with pivot suspension, spring loaded shock absorbing jewel bearing and silicon oil damping is incorporated.


The moving - iron movement has a response time < 4 sec.

Connections

Direct - connected



For use on current Transformer

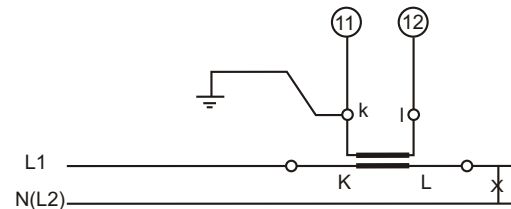

Safety Precautions

- 1) Instruments with damaged bezel or glasses must be disconnected from the mains.
- 2) Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing. If non - insulated connector wires are used.
- 3) The back cover must be snapped into place after connector wires have been clamped for protection against accidental contact.
- 4) Bezel, Scale and Glass may only be replaced under voltage free conditions.
- 5) Instruments to be used in grounded panel.

Ordering Information

Type	BM 48 BM 72/96 EB 72/96	Maximum demand indicator with bimetallic movement Maximum demand indicator with bimetallic movement Maximum demand indicator with bimetallic movement and moving iron
Front Dimension	48mm x 48mm 72mm x 72mm 96mm x 96mm	
Measuring Ranges	1 A 5 A --- /1 A for use on Current transformer — /5A for use on Current transformer	
Front facia	Normal glass ^{*1} Antiglare glass ^{*3} Polycarbonate glass ^{*3}	
Colour of Bezel	Black ^{*1} Red, Blue, Yellow, White ^{*3}	
Position of use	Vertical ^{*1} on request 0....180 ^{o*3}	
Dial	Standard scale same as measuring range ^{*1} Blank dial with division ^{*3} Additional lettering on request ^{*3} Additional numbering on request ^{*3} Coloured marking red or green ^{*3} Coloured sector red or green ^{*3}	
Over range Moving Iron Bimetal movment Moving iron & bimetal	2 times rated current ^{*1} 1.2 times rated current ^{*1} 1.2 times rated current ^{*3}	
Calibration	50 Hz ^{*1} For frequency 15 - 400 Hz ^{*3}	
Calibration	15 min ^{*1} 8 min. ^{*3} 20 min. ^{*3} 30 min. ^{*3}	
Logo	RISHABH ^{*1}	
Terminal Protection	Full sized polycarbonate back cover	

^{*1}Standard

^{*3}Please clearly add the desired specifications while ordering

Ordering example

EB 96 for use on current transformer 300/5A thermal time delay 15 min.

Specifications are subject to change without notice (04/10)



www.rishabh.co.in

RISHABH
INSTRUMENTS
RISHABH
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.
F-31, MIDC, Satpur, Nashik-422 007, India.
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064
E-mail : India :- marketing@rishabh.co.in
International :- exp.marketing@rishabh.co.in
www.rishabh.co.in