




Data Sheet

Anush Series Meters

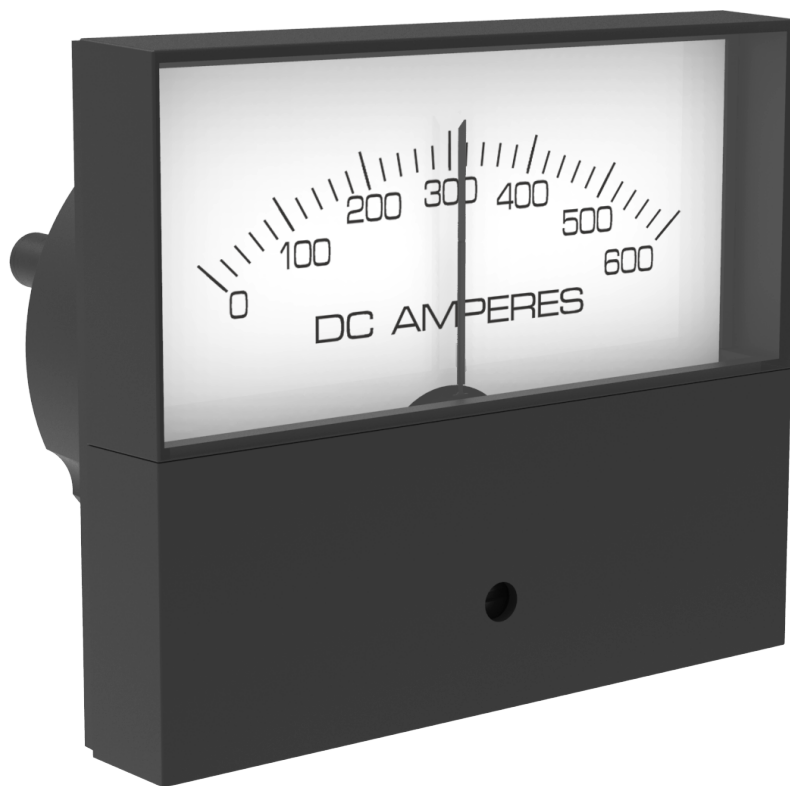

Measure



Control



Record



Analyze



Optimize

Application

The Anush range of analog panel meters offers accurate measurement and indication of most electrical and electronic parameters in industry standard 1^{1/2} ", 2^{1/2} " case sizes. This innovative design features a detachable lower fascia plate which allows the flexibility of either surface or window mounting. The fascia is simply unclipped to achieve the completely flush panel appearance of panel window mounting. The range offers AC and DC ammeters, voltmeters and frequency meters utilizing a high torque scale value and features a rear zero adjuster screw for temper proof installation. AC moving iron meters provided high accuracy true RMS measurement of 1.5%.

Applications:

- Marine
- Switchgear
- Distribution systems
- Control panels
- Embedded generation
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor monitoring

Features

- Measuring & indication of AC amps, volts, frequency & DC signals.
- Surface of window mounting.
- High torque pivot and jewel movement.
- True RMS measurement meters.
- AC and DC inputs.
- Upto 40 A DC direct connected.
- Upto 50 A AC direct connected.

Benefits

- AC moving iron and moving coil mechanisms.
- Reduced inventory.
- ANSI standard case sizes.
- Detachable lower fascia plate.
- Easy to modify for distributions.

Compliant With

- ANSIC39.1
- IEC51
- UL3111-1

Applicable Standards

Nominal case and cutout dimensions for indicating electrical instruments	: IS 2419 DIN 43700
Scale and pointer for electrical measuring instruments	: IS 1248, IEC51 DIN 43802
Connections and Terminal markings for panel meters	: IS 1248, IEC51 DIN 43807
Terminal bolts / leads	: DIN 46200/46282
Clamp straps for connections	: DIN 46282
Safety requirements and protective measures for Electrical indicating instruments and their accessories	: IS 9249 DIN 40050 / 8-70 VDE 0110 /11-72 VDE 0410 /10-76 IEC 529,IEC 1010
Performance specifications for direct acting indicating analogue electrical measuring instruments & their accessories	: IS 1248 IEC 51/DIN EN 60051 DIN 43701
Environmental conditions	: IS 1248 IS: 9000, Part 5,7,8, VDE / VDI 3540
Front frames for indicating measuring instruments principle dimensions	: DIN 43718
UL Combustibility class	: UL 94 V-O
Technical conditions of delivery for electrical instruments	: DIN 43701
Mechanical strength (Free fall test, vibration test)	: IS 1248/IEC 51 IS 9000 VDE 0411, part I, Sec.43/44, IEC 1010
EMC compliance as per following standards	: E N 50081-2,EN 50082-2,N 55011/CISPR 11, EN 60555-2,IEC 555-2 EN 61000-4-4/IEC 1000-4-4, EN 61000-4-2/IEC 1000-4-2, EN 61000-4-5/IEC 1000-4-5,ENV 50140.
Comply with following European directives	: 89 / 336/ EEC (EMC directive), 73 / 23 / EEC (low voltage directive) & amendment 93 / 68 / EEC, for CE marking.



Measure



Control



Record



Analyze



Optimize

Specification

Accuracy	
DC Ammeters and Voltmeters	1.5% 0 to 100% of full scale deflection
AC Ammeters and Voltmeters	Moving Iron: 1.5% 10 to 100% of full scale deflection
Frequency Meters	0.5% of end scale value
Input Ratings	
DC Moving Coil Ammeters	50mA to 50A
DC Moving Coil Voltmeters	50 mV to 600V
AC Moving Coil Ammeters (VQ)	1mA to 10A
AC Moving Coil Voltmeters (VQ)	40V to 600V
AC Moving Iron Ammeters (EQ)	100mA to 60A
AC Moving Iron Voltmeters (EQ)	6V to 600V
Frequency meters	45-50-55Hz, 55-60-65Hz, 45-55-65Hz
Burden	20 to 500V AC Standard 900ohms/volt
Overload	
Voltmeters	2 times for 0.5 sec : 9 overloads 2 times for 5 sec : 1 overload
Ammeters	10 times for 0.5 sec : 9 overloads
DC Center Zero Voltmeter	10 times for 5 sec : 1 overload
Enclosure	
Movement	High torque pivot and jewel moving coil and moving iron
Scale Balance	Within 1% of scale length
Relative Humidity	25% to 80% nominal range of use
Operating Temperature	0° C to +40° C
Storage Temperature	20° C to +55° C
Enclosure Code	IP42
Case and Cover	Matt black case UL94V0 Polycarbonate cover
	Matt black
Bezel Window	Shatterproof polycarbonate
Fixing	Surface mounting: 4 corner studs, 4-40 UNF Rear of panel mounting: 2 through hole mounts
Terminals	011-8-32 UNC 012-1/4"-28 UNC
Compliant With	
Performance	ANSI C39.1 and IEC 51
Manufacture	UL3111-1
Scaling	ANSI C39.1
Safety	IEC61010-1 (LVD) and BS EN 61326:(EMC)
Vibration	ANSI C39.1 cl. 5.13

*1 Possible in 012 case



Measure



Control



Record



Analyze



Optimize

Operation

Moving Coil Meter

These meters offer a centre cored, self shielding moving coil movement using pivots, hair springs and spring jewels. Variations in movement are limited by design. All DC voltmeters are 1000 ohms per volt, moving coil rectified products run at 900 ohms per volt. Milli voltmeters use te 5 milliamps / 50 mV resistance.

Moving Iron Meter

This clapper type repulsion design utilizes a pivot, hair spring and jewel movement. The bottom jewel is oil filled to provide damping while the top is spring for resilience. All voltmeters are manufactured with internal voltage drop per resistors.

Frequency Meter

Frequency meters use a 1mA/350ohm movement driven by an EMC hard frequency conversion circuit.

Dials, Pointers and Scales

Standard dials are matt white, black printed scales and a tubular knife-edge black are balanced within 1% of scale length and feature a highly repeatable flattened arc scale shape, ensuring consistently accurate measurement reading. Dials are interchangeable between the challenge range of products using the same input within the published specification of the meter. Options for non standard customer specific dials are available upon request.



Measure



Control



Record




Analyze







Optimize

A) 011

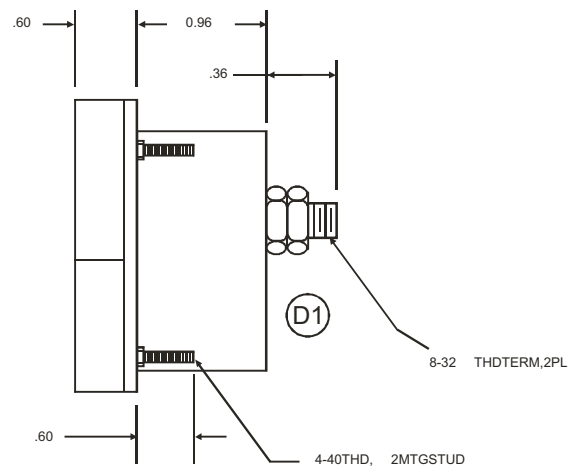

Dimensions

B) 012

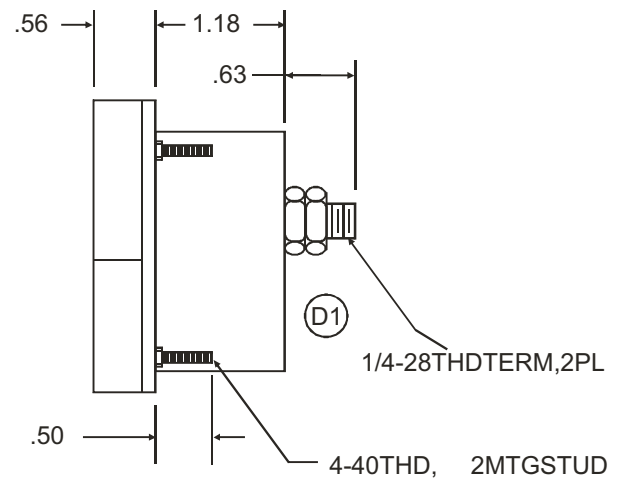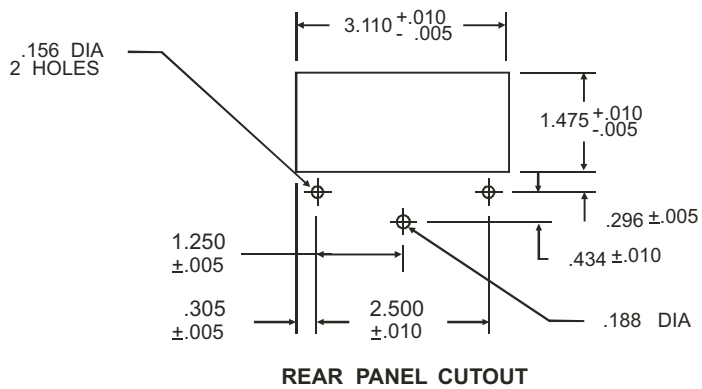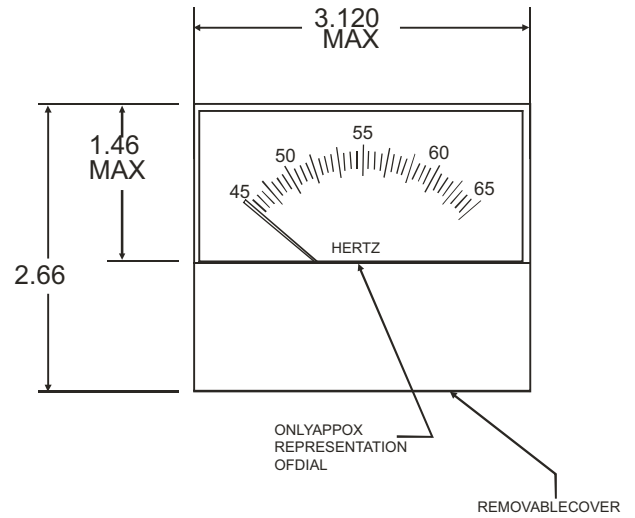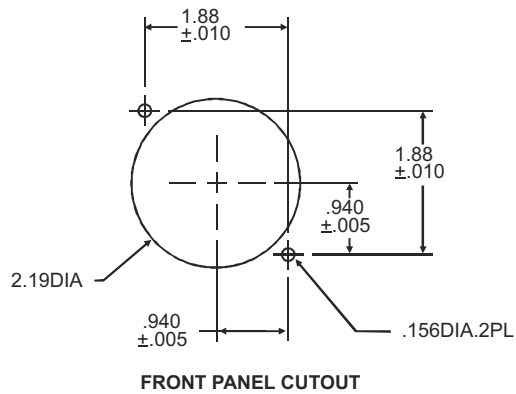

Measure



Control



Record



Analyze



Optimize



RISHABH

Specifications may change without prior notice



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in
www.rishabh.co.in