



Data Sheet

Frequency Meter 240⁰ ZL



Measure



Control



Record



Analyze



Optimize

Application

The pointer type frequency meters, ZL 96/144 housed in moulded polycarbonate cases are used for the measurement of frequencies in the range of 45 to 450 Hz.

For maximum accuracy, the essential measuring range is obtained by suppressing the unwanted frequency span.

These instruments offer several advantages in switchboards and Generating Set Panels. Number of meters can be mounted in a single Cut out (Mosaic mounting). Front glass, Bezel & Dial can be easily replaced.

Features

- Better resolution.
- Linear Scale
- Glass filled polycarbonate (UL 94-V-0)
- Knife edge pointer.
- Easily replaceable glass and bezel.
- Easy installation with swivel screws.

Specifications

Scale and Pointer

Pointer	: Knife - edge pointer
Pointer deflection	: 0 ... 240°
Scale characteristics	: Linear
Scale division	: Coarse - fine
Scale length	: ZL 96 ZL 144
	: 142 mm 230 mm
Scale Interchangeability	: Scales are interchangeable

Mechanical Data

Case details	: Moulded square case suitable for mounting in Control Switchgear panels. Machinery consoles.
Case material	: Glass filled polycarbonate, flame retardant and drip proof as per UL 94 V-0.
Front facia	: Glass
Colour of bezel	: Black
Position of use	: Vertical
Panel fixing	: Swivel Screws
Mounting	: Stackable in single cutout
Panel thickness	: ≤ 25 mm
Terminals	: Hexagon studs, M4 screws And wire clamps E3

Electrical Data

Measured quantity	: Frequency
Overload capacity (acc to IS : 1248/ IEC 51)	
Continuously	: 1.2 times rated voltage
Short duration	: 2 times rated voltage, 5 Sec
Input quantity	: Alternating voltage in sine waveform

Enclosure code (IEC 529)	: IP 52 case IP 00 for terminals
--------------------------	-------------------------------------

Insulation class	: Group A according to VDE 0110
Rated insulation	: voltage 660 V
Proof voltage	: 2 kV
installation category	: 300 V CAT III
Power consumption	: ≤ 7VA
Insulation resistance	: > 50 Mohm at 500 V d.c.

Accuracy at Reference Conditions

Accuracy class	: 0.5 according to IS:1248 (IEC 51/ DIN EN 60051)
Reference conditions	
Ambient temperature	: 23°C ± 2°C
Position of use	: Nominal position + 1°
Input	: Rated voltage of measured quantity
Voltage	: Rated voltage ± 2%
Other conditions	: IS : 1248 (IEC 51/DIN EN 60051)
Preheating time	: ≥ 5 min
Nominal range of use	
Ambient temperature	: 0 ... 50° C
Position of use	: Normal position ± 5°
External magnetic field	: 0.5 mT
Voltage	: Rated voltage ± 15%

Environmental Conditions

Climatic suitability	: Climate category II as per IS : 1248 (climatic class 3 according to VDE/VDI 3540)
Operating temperature	: - 10... + 55°C
Storage temperature	: - 25... + 65°C
Relative humidity	: ≤75% annual average, non condensing
Shock resistance	: 15g, 11 ms
Vibration resistance	: 10-55-10Hz / 0.15mm 1.5 g at 50Hz

Options

Case	
Front facia	: Antiglare glass
Colour of bezel	: Red, Yellow, Blue, White
Red index pointer	: Front adjustable on site
Position of use	: on request 0°....180°
Dial	
Blank dial	: With initial & end values marked.
Special markings	: Numbering /Lettering.
Division dials	: Basic divisions without numbering.
Colour markings/bands	: Red or green.

Standard Measuring Ranges

Frequency Range	
	45.....50.....55Hz
	45.....55.....65Hz
	55.....60.....65Hz
	360...400...440Hz
	380...400...420Hz



Measure



Control



Record



Analyze



Optimize

Rated input voltage

57.7 V
63.5V
100 V
110 V
115 V
120 V
127V
208 V
220 V
230 V
240 V
289 V
380 V
400 V
415 V
440 V
500 V

Front frames for indicating measuring instruments principle dimensions. : DIN 43718

UL Combustibility class. : UL 94 V-0

Technical conditions of delivery for electrical instruments. : DIN 43701

Mechanical strength (Free fall test, vibration test) : IS 1248/IEC 51
IS 9000-1979
VDE 041, part I,
Sec.43/44,
IEC 1010

E M C compliance as per following standards:
E N 50081-2,EN 50082-2,EN 55011/CISPR 11,
EN 60555-2,IEC 555-2
EN 61000-4-4/IEC 1000-4-4,
EN 61000-4-2/IEC 1000-4-2,
EN 61000-4-5/IEC 1000-4-5,ENV 50140.

Comply with following European directives : 89 / 336/ EEC
(EMC directive), 73 / 23 / EEC (low voltage directive) &
amendment 93 / 68 / EEC, for CE marking.

Functional Principle

Frequencies are measured with a built in electronic transducer & moving coil indicator. Moving coil movement has pivots of very high hardness. Movement is suspended between spring loaded sapphire jewels. Movement is properly shielded & critically damped by eddy currents induced in coil former.

Applicable Standards

Nominal case and cutout dimensions for indicating measuring instruments. : IS 2419
DIN 43700

Scale and pointer for electrical measuring instruments : IS 1248
DIN 43802

Connections and Terminal markings for panel meters : IS 1248
DIN 43807

Terminal bolts / leads : DIN 46200/46282

Clamp straps for connections. : DIN 46282

Safety requirements and protective measures for Electrical indicating instruments and their accessories. : IS 9249
DIN 40050 / 8-70
VDE 0110 /11-72
VDE 0410 /10-76
IEC 529,IEC 1010

Performance specifications for direct acting indicating analogue electrical measuring instruments & their accessories: : IS 1248
IEC 51/DIN EN
60051DIN 43701

Environmental conditions : IS 1248
IS: 9000, Part 5, 7,
8,VDE / VDI 3540

Safety Precautions

- Instruments with damaged bezels or window glasses must be disconnected from mains.
- Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing, if non - insulated connector wires are used.
- The back cover must be snapped into place after the connector
- Scales should be replaced under Voltage - free conditions.
- Bezels and window glasses should be replaced under Voltage - free conditions



Measure



Control



Record




Analyze




Optimize

Connections

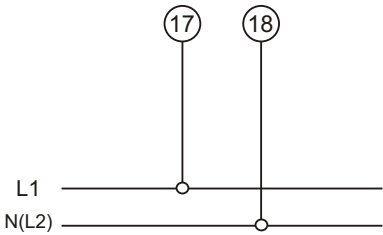

Dimensions



Dimensions (in mm)		ZL 96	ZL 144
Bezel	a	96	144
Case	b	90	136
Depth	c	53	53
	d	91.5	137.5
	e	5.5	5.5
Cutout Size		92 ^{+0.8}	138 ⁺¹
Weight (approx.)		0.45 kg	0.6 kg

Ordering Information

Type ZL	Pointer type frequency meter, 240° scale
Front dimension 96, 144	96 mm x 96 mm 144 mm x 144 mm
Measuring Ranges	Refer to table inside
Front Facia	Normal glass ^{*1} , Antiglare glass ^{*3}
Colour of Bezel	Black ^{*1} Red, Blue, Yellow, White ^{*3}
Position of use	Vertical ^{*1} On request 0 180° ^{*3}
Terminal protection	Full sized polycarbonate back cover
Rated voltages	Refer to table inside
Dial	Standard scale same as measuring range ^{*1} Blank dial with division ^{*3} Additional lettering on request ^{*3} Additional numbering on request ^{*3} Coloured marking red or green ^{*3} Coloured sector red or green ^{*3}
Logo	RISHABH ^{*1} for Indian sales Others ^{*3}

^{*1} Standard

^{*3} Please clearly add the desired specifications while ordering

Ordering Example

ZL 96 measuring range 45 ... 50 ... 55Hz, rated voltage AC 230V.

Specifications are subject to change without notice (11/11)



Measure



Control



Record



Analyze



Optimize



RISHABH

Specifications may change without prior notice



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in
www.rishabh.co.in