



Data Sheet

Power Factor Meter 240⁰ CL



Measure



Control



Record



Analyze



Optimize

Application

The moving coil indicators CL 96/144 and a phase angle adjuster are used to monitor changing power factor conditions on ir -reversible balanced load systems.

The power factor is indirectly determined by measuring the phase angle ϕ between current and voltage (both sinusoidal). However the indicators are calibrated in values of $\cos \phi$ of the angle ϕ

These meters offer several advantages in Switchboard and Generating Set panels. Number of meters can be mounted in a single Cut out (Mosaic Mounting). The Bezel, Front window glass and Dial can be easily replaced

Features

- Better resolution.
- Knife edge pointer.
- Glass filled polycarbonate(UL 94-V-0)
- Easily replicable glass and bezel.
- Easy installation with swivel screws.

Specifications

Scale and Pointer

Pointer	: Knife - edge pointer
Pointer deflection	: 0 ... 240°
Scale characteristics	: Non-Linear
Scale division	: Coarse - fine
Scale length	: CL 96, CL 144
	: 142 mm 230 mm
Scale Interchangeability	: Scales are interchangeable.

Mechanical Data

Case details	: Moulded square case suitable for mounting in Control/Switchgear panels, Machinery consoles..
Case material	: Glass filled polycarbonate, flame retardant and drip proof as per UL 94 V-0.
Front facia	: Glass
Colour of bezel	: Black
Position of use	: Vertical
Panel fixing	: Swivel screws
Mounting	: Stackable in a single cutout
Panel thickness	: <=25 mm
Terminals	: Hexagon studs, M4 screw and wire clamps E3 (DIN 46282)

Electrical Data

Measuring quantity	: Power factor
Overload capacity (acc to IS	: 1248/ IEC 51)
Continuously	: 1.2 times rated voltage / current
Short duration	: 2 times rated voltage , 5 Sec max

Power consumption (Approx):-

Current path	: ≤ 1.0 VA
Voltage path types	: ≤ 3.5 VA
Enclosures code (IEC 529)	: IP 52 case IP 00 for terminals
Insulation class	: Group A according to VDE 0110
Rated insulation voltage	: 660 V
Proof voltage testing	: 2 kV
Installation category (IEC 1010)	: 300 VCAT III
Insulation resistance	: > 50 Mohm at 500 V d.c.

Accuracy at Reference Conditions

Accuracy class	: 1.5 according to IS:1248 (IEC 51/ DIN EN 60051)
Reference conditions	
Ambient temperature	: 23°C $\pm$ 2°C
Position of use	: Nominal position $\pm$ 1°
Waveform	: Sinewave
Current	: 95...100% rated current
Warmup	: ≥ 5 minutes at min 80% of rated current & 100% of rated voltage. IS : 1248 (IEC 51 / DIN EN 60051)
Voltage	: Rated voltage $\pm$ 2%
Frequency	: 50 Hz $\pm$ 0.1%
Others	: IS1248 (IEC 51/ DIN EN 60051)
Distortion factor	: $\leq 1\%$
Nominal range of use	
Ambient temperature	: 0 ... 50°C
Position of use	: Nominal position $\pm$ 5°
External magnetic field	: 0.5 mT
Voltage	: Rated voltage $\pm$ 15%
Current	: 20 to 120% of rated current
Frequency	: 49-51 Hz

*Note for frequency 60Hz contact factory

Environmental Conditions

Climatic suitability	: Climate category II as per IS : 1248 (climatic class 3 according to VDE/VDI 3540)
Operating temperature	: -10 ... + 55°C
Storage temperature	: -25 ... + 65°C
Relative humidity	: $\leq 75\%$ annual average, non-condensing
Shock resistance	: 15g. 11ms
vibration Resistance	: 10-55-10 Hz / 0.15 mm 1.5 g at about 50Hz

Standard Measuring Ranges

Type	
E	Single phase system
D	3 phase system balanced load

Measuring ranges

COS ϕ	cap 0.5....1...0.5 ind
COS ϕ	cap 0.8....1....0.3 ind
COS ϕ	cap 0.8....1....0.8 ind



Measure



Control



Record



Analyze



Optimize

Rated voltages

Following single phase and three phase voltages are available as standard. The voltage will be considered as a phase voltage (between phase & neutral) in case of single phase meters and as a line voltage (between two phases) in case of multi phase 2 wire, 3 wire and 4 wire meters

Please clearly specify the application (3 ph. 2 wire, 3 wire or 4 wire).

Single Phase	Three Phase
57.5	100
63.5	110
100	220
110	380
127	415
220	440
230	500
240	
289	

Rated currents :-

1A
5A


Options

Case	
Front facia	: Antiglare glass
Colour of bezel	: Red, Yellow, Blue, White
Red index pointer	: Front adjustable on site
Position of use	: on request 0°....180°
Dial	
Blank dial	: With initial and end values marked.
Special markings	: Numbering /Lettering.
Division dials	: Basic divisions without numbering.
Colour markings/bands	: Red or green.

Functional Principle

The measuring system comprises a moving coil indicator & phase angle converter attached to the case of indicating instrument. moving coil movements has pivots of very high hardness. Movement is suspended. between spring loaded saphire jewels. movement is properly shielded & critically damped by eddy currents induced in coil former.

Schematic Diagram :-

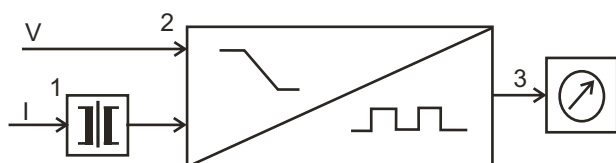

current transformer 1 of the phase angle converter provides input current to the electronic circuit. Both the input voltage and the current are passed to a bistable flip-flop stage 2.

The pulse duty cycle of flip-flop is proportional to the phase angle. A low pass filter allows the mean value which is proportional to the phase angle and is fed to the moving coil movement 3.

Applicable Standards

Nominal case and cutout dimensions for indicating measuring instruments.	: IS 2419 DIN 43700
Scale and pointer for electrical measuring instruments.	: IS 1248 DIN 43802
Connections and Terminal markings for panel meters	: IS 1248 DIN 43807
Terminal bolts / leads	: DIN 46200/46282
Clamp straps for connections.	: DIN 46282
Safety requirements and protective measures for Electrical indicating instruments and their accessories.	: IS 9249 DIN 40050 / 8-70 VDE 0110 /11-72 VDE 0410 /10-76 IEC 529,IEC 1010
performance specifications for direct acting indicating analogue electrical measuring instruments & their accessories	: IS 1248 IEC 51/DIN EN 60051 DIN 43701
Environmental conditions	: IS 1248 - 1983 IS: 9000, Part 5,7,8, VDE / VDI 3540 DIN 43701
Technical conditions of delivery form electrical instruments.	: DIN 43718
Front frames for indicating measuring instruments principle dimensions.	: UL 94 V-0
UL Combustibility class.	: IS 1248, IEC 51
Mechanical strength (Free fall test, vibration test)	: IS 9000- VDE 0411, Part 1, Sec.43/44.IEC 1010
Environmental conditions	: IS 1248 IS: 9000, Part 5, 7, 8, VDE / VDI 3540
Electro Magnetic Compatibility (EMC) Compliance as per following standards:-	

EN 50081-2, EN 50082-2,
EN 55011 / CISPR 11,
EN 60555-2, IEC 555-2,
EN 61000-4-4 / IEC 1000-4-4,
EN 61000-4-2 / IEC 1000-4-2,
EN 61000-4-5 / IEC 1000-4-5,
ENV 50140.

Comply with following European directives : 89 / 336/ EEC (EMC directive), 73 / 23 / EEC (low voltage directive) & amendment 93 / 68 / EEC, for CE marking.



Measure



Control



Record



Analyze




Optimize

Safety Precautions


- Instruments with damaged bezels or window glasses must be disconnected from mains.
- Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing, if non - insulated connector wires are used.
- Scales should be replaced under Voltage - free conditions.
- Bezels and window glasses should be replaced under Voltage - free conditions

Connections


CL 96/144 Single phase

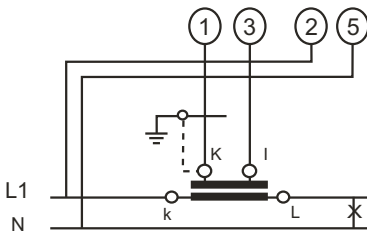


CL 96/144 Three phase balanced load

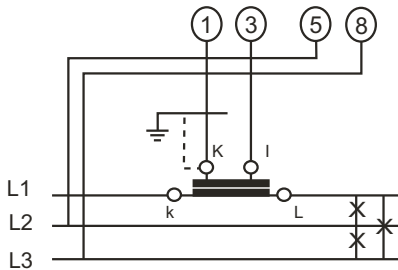


CL 96/144 3ph. 3W Unbal. Load

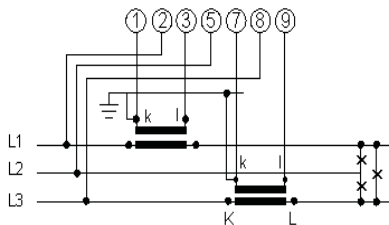

CL 96/144 3ph. 4W Unbal. Load

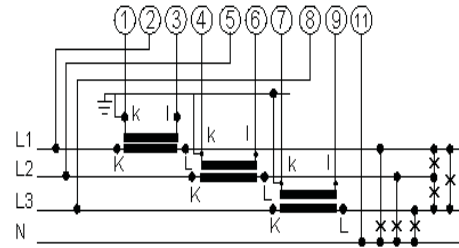

Dimension

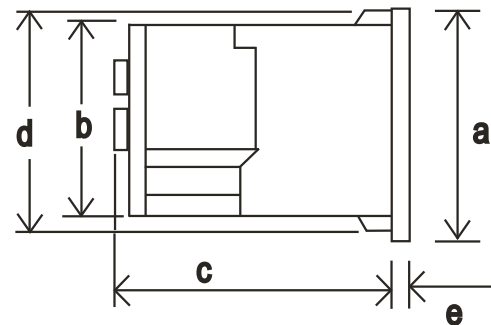

Dimensions (in mm)		CL 96	CL 144
Bezel	a	96	144
Case	b	90	136
Depth	c	102	136
	d	91.5 ^{+0.8}	137.5
	e	5.5	5.5
Cutout Size		92	138 ^{+0.1}
Weight (approx.)		0.68 kg	0.8 kg



Measure



Control



Record



Analyze



Optimize

Ordering Information

Type CL	Power Factor meter 240 degree scale
Front dimension 96,144	96 mm x 96 mm 144 mm x 144 mm
Type	Single phase systems 3 phase system balance load 3 phase system unbalance load
Measuring ranges (COS ϕ)	cap 0.5...1...0.5 ind cap 0.8...1...0.3 ind cap 0.8...1...0.8 ind
Terminal protection	full sized polycarbonate backcover
Rated Voltages	Refer to table inside
Rated Currents	1 A, 5 A
Front Facia	Normal glass ^{*1} Antiglare glass ^{*3}
Colour of Bezel	Black ^{*1} Red, Blue, Yellow, White ^{*3}
Position of use	Vertical ^{*1} on request 0....180 ^{0°3}
Dial	Standard scale same as measuring range ^{*1} Additional lettering on request ^{*3} Additional numbering on request ^{*3} Coloured marking red or green ^{*3} Coloured sector red or green ^{*3}
Logo	RISHABH ^{*1} , for Indian sales C.G. ^{*1} , for export through Crompton Greaves I.D. Others ^{*3}

^{*1} Standard

^{*3} Please clearly add the desired specifications while ordering

Ordering Example

CL 96 for 3 phase system balanced load, measuring range (cos ϕ) cap 0.5...1...0.5 ind, rated voltage AC 230 V, rated current 1A.

Specifications are subject to change without notice(11/11)



Measure



Control



Record



Analyze



Optimize



RISHABH

Specifications may change without prior notice



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in
www.rishabh.co.in