




RISHABH

Data Sheet

Single-Phase Direct Connected AC Energy Meter

RISH ED11XX-X

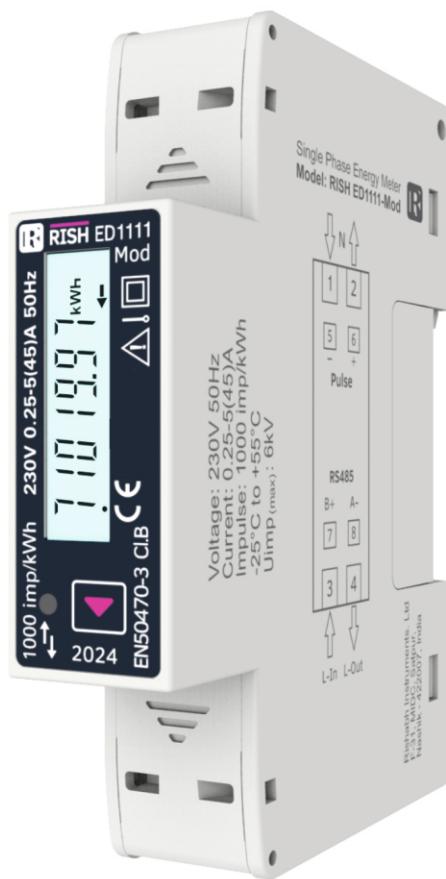

Measure



Control



Record



Analyze

Overview :

RISH ED11XX is a modern Single Phase Direct Connected AC Energy Meter designed for intended use in residential, commercial and light industrial Electrical Energy Metering. The meter is engineered using advanced microcontroller technology and is suitable for electrical parameter measurement and monitoring in 1 Phase 2 Wire Networks. It supports maximum 45 A current measurement on direct connection. It supports Tariff Counters selectable via MODBUS or MBUS Communication or Tariff input. It displays parameters on bright LCD and also has Pulse Output and Impulse LED for energy monitoring. It has inbuilt industry standard MODBUS RTU or MBUS for remote monitoring. Meter housing is standard Din Rail Mount that allows ease of installation.

Product Features :

Direct Connection Meter :

The meter can safely measure 45 A maximum current on direct connection, eliminating the use of expensive external CT for high current networks. Meter is also self-powered thus offer simplified connections.

Measured Electrical Parameters :

The meter is primarily for bidirectional Active, Reactive and Apparent Energy measurement but it also accurately measures important electrical parameters like Voltage, Current, Frequency, Active, Reactive and Apparent Power, and Power Factor in Single Phase Networks. The measured parameters can be viewed on display and MODBUS or MBUS for remote viewing.

Demand :

The Demand parameter for Active Power (Import/Export), Reactive Power (Import/Export), Apparent Power and Current are calculated as per configurable Demand Integration time.

Pulse Output (Optional) :

The meter has one optional opto-isolated potential free pulse output that can be configured for any one of the Active (Import/Export), Reactive (Import/Export) and Apparent Energy parameter. The pulse width and rate of pulse out is onsite programmable.

Impulse LED :

The meter has Impulse LED which flash at rate of 1000 impulse per 1 kWh indicating the Active Energy consumption.

LCD :

The LCD has bold seven segment digits with bright white backlit for display of measurement parameters.

Measurement screen can be set as automatic scrolling or manual scrolling.

Front Key :

One key is provided for easy navigation and accessibility of different parameters.

Remote Communication(Optional) :

The meter provides optional communication based on MODBUS or MBUS protocol for remote data acquisition of measurement data and configuration. MODBUS or MBUS parameters are Baud rate, device address and parity-stop bits are programmable.

Tariff Input(Optional) :

The meter has one Tariff Input dedicated for selection of active tariff T1 and T2. The opto-isolated Tariff is rated for a wide range of AC voltage for operation.

Dual tariff :

The meter has Tariff Counters for energy accumulation which are selectable via Tariff Input or via MODBUS or MBUS Communication. Energy for tariff are Active Energy (Import/Export/Total), Reactive Energy (Import/Export/Total) and Apparent Energy.

Compliance to Standards :

| | |
|---|-----------------|
| National / International Standards are complied | |
| Accuracy Standard : | EN50470-3 :2022 |
| | IEC62053-21, 23 |
| IP for water & dust: | IEC 60529 |
| Plastic Flammability Standard: | UL 94 |
| Safety Standard: | 62052-31:2015 |

Datasheet subject to change without notice



Measure



Control





Record



Analyze

Dimensions Details:

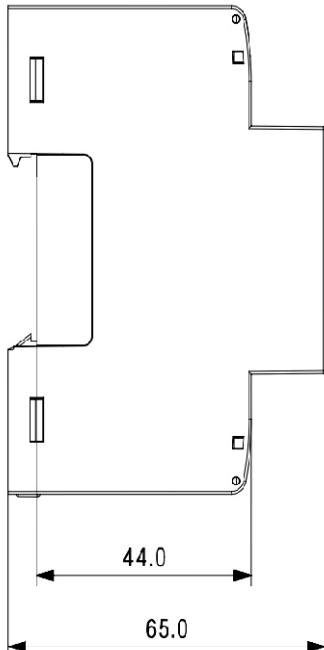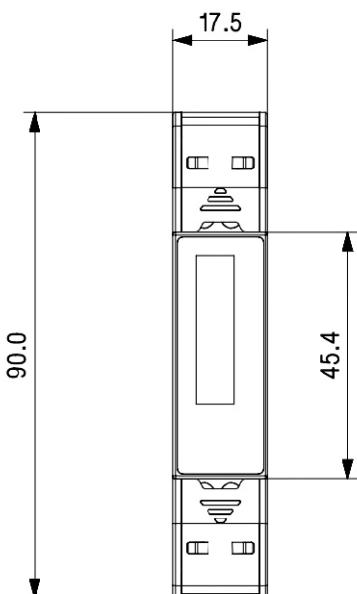

Technical Specifications:

Input :

| | |
|---|--|
| Nominal Voltage (U_n) | 230 VLN |
| Operating Voltage Range | 193 - 253 VLN |
| Power consumption in Voltage Circuit | < 2 W (10 VA) |
| Starting Current ($I_{st} = 0.04*I_{tr}$) | 20 mA |
| Minimum Current ($I_{min} = 0.5*I_{tr}$) | 250 mA |
| Transitional Current (I_{tr}) | 0.5 A |
| Nominal Current ($I_{tr} = 10*I_{tr}$) | 5 A |
| Maximum Current ($I_{max} = 90*I_{tr}$) | 45 A |
| Operating Current Range | 0.25-5 A (45 A) |
| Short time Over-current | $30*I_{max}$ for one half-cycle at 50 Hz |
| Power consumption in Current Circuit | <1 VA per phase |
| Nominal Frequency | 50 / 60 Hz |
| Operating Frequency Range | 45 to 66 Hz |

Auxiliary Supply :

| | |
|------|--------------|
| Type | Self Powered |
|------|--------------|

Reference Conditions for Accuracy :

| | |
|-----------------------|--|
| Reference Temperature | $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ |
| Input Voltage | $Un \pm 1\%$ |
| Input Waveform | Sinusoidal (distortion factor <2%) |
| Input Frequency | $50 \text{ Hz} \pm 0.3\%$ |

Accuracy :

| | |
|---------------------------------|---------------------------------|
| Active Energy (Import/Export) | Class B as per EN50470-3 : 2022 |
| Reactive Energy (Import/Export) | Class 1 as per IEC 62053-21 |
| Apparent Energy | Class 2 as per IEC62053-23 |
| Voltage | $\pm 1.0\%$ |
| Current | $\pm 0.5\%$ of range max |
| Frequency | $\pm 0.2\%$ of Mid frequency |
| Active Power | $\pm 1\%$ of range max |
| Reactive Power | $\pm 1\%$ of range max |
| Apparent Power | $\pm 1\%$ of range max |
| Power Factor | $\pm 1.0\%$ |

Pulse Outputs :

| | |
|----------------|--|
| So1 | Passive Opto-isolated |
| Contact Range | 5-27V DC, 27 mA DC (max) |
| Pulse Duration | 60,100,200 millisecond |
| Pulse Rate | 1,10,100,1000 pulse per kWh/kVARh/kVAh |

Impulse LED :

| | |
|--------------|--------------------|
| Impulse Rate | 1000 pulse per kWh |
|--------------|--------------------|

Communication Interface(MODBUS) :

| | |
|-------------------|---|
| Protocol | RS485 MODBUS |
| Baudrate | 2.4 / 4.8 / 9.6 / 19.2/38.4 kbit |
| Data Width | 8 |
| Parity- Stop Bits | None -1 / None -2/ Even -1 / Odd -1 |
| Device Address | 1- 247 |
| Response Time | < 200 millisecond (1000 millisecond for 2.4/ 4.8 Kbit Baudrate) |

Datasheet subject to change without notice



Measure



Control




Record



Analyze

Connector Details:

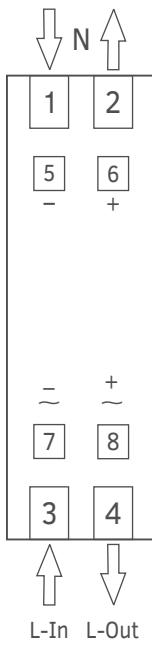

- 1- Neutral IN
- 2- Neutral Out
- 3- L-In
- 4- L-Out
- 5,6 Pulse Output Terminal
- 7,8 Tariff input Terminal (in Tariff input Model)
RS485 Terminal (in Modbus Model)
Mbus Terminal (in MBUS Model)

Communication Interface(MBUS) :

| | |
|--------------------|-----------------------------------|
| Protocol | EN13757-3 MBUS |
| Baudrate | 0.3/ 0.6/ 1.2/ 2.4/ 4.8/ 9.6 kbps |
| Data Width | 8 |
| Parity - Stop Bits | Even -1 |
| Address | 1 250 |

Display Ranges :

| | |
|-----------------|---|
| Active Energy | 0.01-99999.99 kWh & Autoranging further |
| Reactive Energy | 0.01-99999.99 kVARh & Autoranging further |
| Apparent Energy | 0.01-99999.99 kVAh & Autoranging further |
| Active Power | 0-99999 W |
| Reactive Power | 0-99999 VAR |
| Apparent Power | 0-99999 VA |

Installation :

| | |
|--------------|---|
| Installation | Indoor |
| Enclosure | IP51(front side) & IP20(terminal side) (IEC 60529: 2001) |
| Housing | 1 Module DIN 43880 |
| Dimensions | 17.5 mm X 90 mm X 65 mm |
| Weight | 150 gm |
| Mounting | 35 mm DIN Rail |

Safety :

| | |
|---------------------------|---|
| Safety Standard | According to 62052-31:2015 |
| Installation Category | III |
| Protective Class | II (EN 50470-3) / IEC61010 (IEC) |
| High Voltage Test | 4 kV AC, 50Hz for 1 minute between all electrical circuits |
| Impulse Voltage Withstand | 6.0 kV (1.2 microsecond waveform) |
| Pollution Degree | 2 |
| Housing Flame Resistance | Flammability Class V-0 acc. to UL 94, Self Extinguishing, Non Dripping, free of Halogen |

Environmental Conditions :

| | |
|-------------------------------|--|
| Mechanical Environment | M1 |
| Electromagnetic Environment | E2 |
| Operating Temperature | -25°C to +55°C |
| Storage/Transport Temperature | -40°C to +70°C |
| Relative Humidity | 0... 95% (Non Condensing) |
| Shock | Half sine wave, peak acceleration 30g _n (300 m/s ²), pulse duration 18msec |
| Vibration | 10...150Hz, f<60 Hz 0.075mm constant amplitude, f>60Hz 1g _n constant acceleration, 10 sweep cycles per axis |
| Altitude | < 2000 m max |

Wiring Guidelines:

| | |
|--|--|
| Current Input Wire Size | 2.5 -10 mm ² (use insulated pin type lug) |
| Current/Voltage Tightening Torque | 0.5 Nm |
| RS485,MBUS,SO,Tariff Inputs Wire Size | 1 to 2.5 mm ² (Solid/Stranded with insulated pin type lug) |
| RS485,MBUS,SO,Tariff Tightening Torque | 0.4 Nm |


Tariff Input :

| | |
|-------|------|
| 0 V | Low |
| 230 V | High |

Datasheet subject to change without notice



Measure



Control



Record



Analyze

Data Sheet

RISH ED11XX

Measured Parameter :

✓ : Available

✗ : Not Available

| Sr No | Parameters | 1 Phase 2 Wire |
|-------|---------------------------------|----------------|
| 1. | Import Active Energy | ✓ |
| 2. | Export Active Energy | ✓ |
| 3. | Total Active Energy | ✓ |
| 4. | Import Reactive Energy | ✓ |
| 5. | Export Reactive Energy | ✓ |
| 6. | Total Reactive Energy | ✓ |
| 7. | Total Apparent Energy | ✓ |
| 8. | Tariff 1 Import Active Energy | ✓ |
| 9. | Tariff 1 Export Active Energy | ✓ |
| 10. | Tariff 1 Total Active Energy | ✓ |
| 11. | Tariff 1 Import Reactive Energy | ✓ |
| 12. | Tariff 1 Export Reactive Energy | ✓ |
| 13. | Tariff 1 Total Reactive Energy | ✓ |
| 14. | Tariff 1 Total Apparent Energy | ✓ |
| 15. | Tariff 2 Import Active Energy | ✓ |
| 16. | Tariff 2 Export Active Energy | ✓ |
| 17. | Tariff 2 Total Active Energy | ✓ |
| 18. | Tariff 2 Import Reactive Energy | ✓ |
| 19. | Tariff 2 Export Reactive Energy | ✓ |
| 20. | Tariff 2 Total Reactive Energy | ✓ |
| 21. | Tariff 2 Total Apparent Energy | ✓ |
| 22. | Partial Import Active Energy | ✓ |
| 23. | Partial Export Active Energy | ✓ |
| 24. | Partial Total Active Energy | ✓ |
| 25. | Partial Import Reactive Energy | ✓ |
| 26. | Partial Export Reactive Energy | ✓ |
| 27. | Partial Total Reactive Energy | ✓ |
| 28. | Partial Total Apparent Energy | ✓ |
| 29. | Max Import kVA Demand | ✓ |
| 30. | Max Current Demand | ✓ |
| 31. | Max Export kVA Demand | ✓ |
| 32. | Max Import kW Demand | ✓ |
| 33. | Max Export kW Demand | ✓ |
| 34. | Max Import kVAR Demand | ✓ |
| 35. | Max Export kVAR Demand | ✓ |
| 36. | Voltage | ✓ |
| 37. | Current | ✓ |
| 38. | Frequency | ✓ |
| 39. | Active Power | ✓ |
| 40. | Reactive Power | ✓ |
| 41. | Apparent Power | ✓ |
| 42. | Power Factor | ✓ |
| 43. | Number of Interruptions | ✓ |

Datasheet subject to change without notice



Measure



Control



Record



Analyze

Order Code:

Ordering Information:

| | |
|---|---|
| Product Code : | ED11 - Z - 0 - 01 - 01 - X - 0 - B - 0000 |
| 1Ph Direct Connected AC Energy Meter | |
| Current Range: 01 - 0.25-5 A (45 A) | |
| Rs485 OR Tariff input and Pulse Output: A = 1 Tariff Input + 1 SO Output (ED1101 2TS) B = RS485 with 1 SO Output (ED1111 Mod) | |

Order Code Example:

ED11-Z00101B0B0000

ED1111-Mod 1 Phase Direct Connected AC Energy Meter with Input voltage 193-253VLN, 0.25-5 A (45 A), RS485, 1 SO Output.

Datasheet subject to change without notice



Measure




Control



Record



Analyze

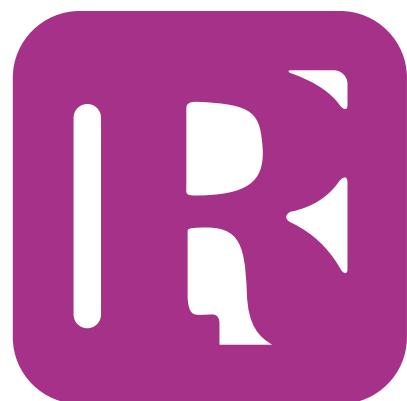

RISHABH



Measure



Control



Record



Analyze

Rishabh Instruments Limited, F31, MIDC, Satpur, Nashik-422007, Maharashtra, India

Tel: +91 253 2202028 | Fax: +91 253 2351064 | E-mail: marketing@rishabh.co.in | www.rishabh.co.in