



Data Sheet

RISH FLEX-e 4512A

Power Supply



Measure



Control



Record




Analyze




Optimize


Block diagram:

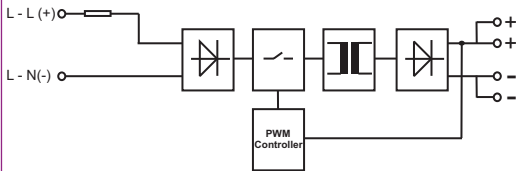

Temperature derating curve:

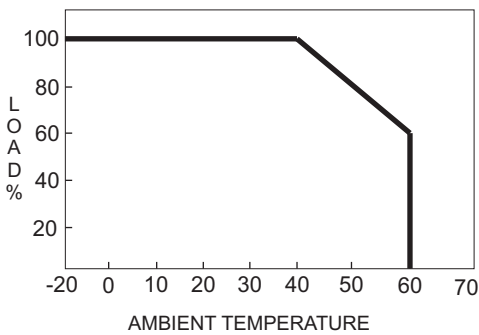

Dimensional details:

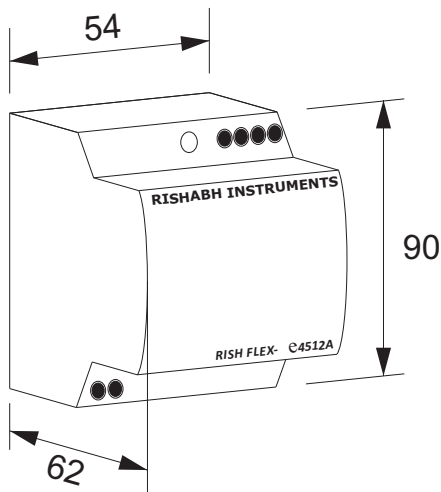

w x h x d

54 x 90 x 62

all dimensions are in mm

Technical Specifications:

INPUT DATA :

AC input voltage range	90 VAC...264 VAC
DC input voltage range	124 VDC ... 370 VDC
Nominal input voltage	115 VAC / 230 VAC (165 VDC / 325 VDC)
Inrush current	≤ 36 A typical
AC frequency range	45 Hz ... 65 Hz
Input current	0.95 A (115 VAC) , 0.55 A (230 VAC)
Internal fuse	T4 A

External fuse (recommended) 10A (MCB curve B)

OUTPUT DATA :

Nominal output voltage	12 VDC ± 3%
Adjustment range	10 VDC ... 15 VDC
Rated current at 12 VDC	3.75 A @ 50 °C 2.8 A @ 60 °C
Power boost current @ 60 °C	3.75 A (For ≤ 3 Minutes)
Holdup time	≥ 20 msec (230 VAC)
Line regulation	< ± 1.0 %
Load regulation	< ± 1.0 % (change in load, static 10% ... 90%)
Overload	105...160% rated output power
Dissipation power load max	6.2 W
Efficiency	> 87 %
Residual ripple ^{Note 2}	≤ 150 mVpp
Short circuit protection	Yes
Overload protection	Yes (Hiccup mode)
Overvoltage output protection	Yes (24 VDC Typ.)
Parallel connection	No
Series connection	Yes
Turn on Delay	2 Seconds
Rise time	30 msec



Measure



Control



Record







Analyze



Optimize

Installation:

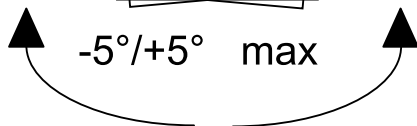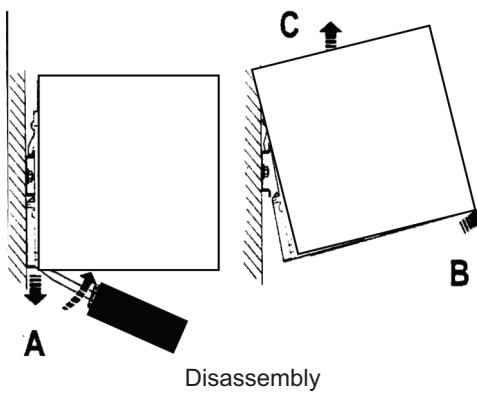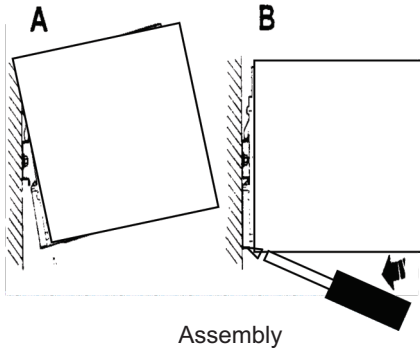

Maximum angle of Assembly

Technical Specifications: (cont.)

GENERAL DATA :

Isolation voltage input/output	3000V AC
Degree of protection	IP20 (EN/IEC 60529)
Protection class	II
MTBF	> 4,50,000 Hrs in acc. with IEC 61709 (SN 29500)
Type of housing	Plastic enclosure
Housing material	PC Lexan 940
Dimensions W / H / D	54 mm / 90 mm / 62 mm
Weight	0.25 kg approx.
Connection terminal blocks	Screw type 2.5 mm ²

CLIMATIC DATA :

Ambient temperature (operation)	-25 °C ... +60 °C
Ambient temperature (storage)	-40 °C ... +85 °C
Humidity at 25 °C	95 % (no condensation)
Pollution degree environment	2 (in acc. with EN 50178)
Climatic class	3K3 (in acc. with EN 60721)



Measure



Control



Record





Analyze




Optimize

Electrical Connection:

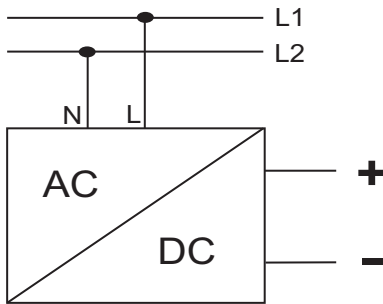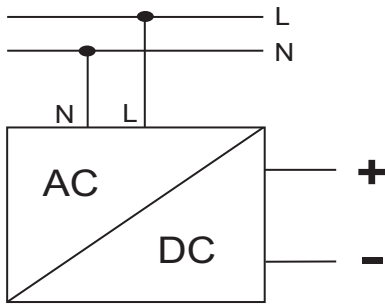

Layout:

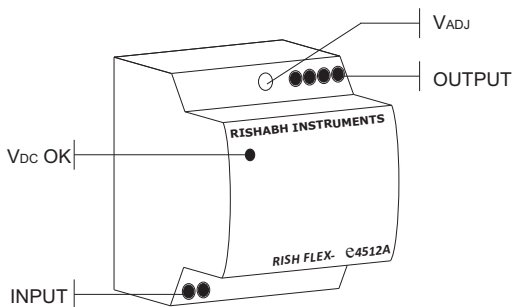

Technical Specifications: (cont.)

STANDARDS :

Electrical safety:

Assembling device	IEC/EN 60950 (VDE 0805) EN 50178 (VDE 0160)
Installation according	IEC/EN 60950
Input/output separation	EN 60950-1(SELV) , EN 60204-1(PELV) Double or reinforced insulation

EMC standards immunity	IEC 61326-1:2012, Table 2. EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5
------------------------	--

EMC standards emission	EN 61000-6-4 EN 61000-3-2
------------------------	------------------------------

Safety of electrical equipment for machines	EN 60204-1
---	------------

Note:

- 1) All parameters not specifically mentioned are measured at 230VAC input, Rated load and 25°C of ambient temperature.
- 2) Ripple and noise are measured at 20MHz of bandwidth short length lead terminated with a 0.1uF & 47uF parallel capacitor.

Model No	Order Code	Input Voltage	Output Voltage	Output Current	Power Range
1P FLEX - e 4512A	RF14-1R000000000000	115 V AC/ 230V AC	12 V DC	3.75 A	45 W
1P FLEX - e 4524A	RF14-1L000000000000		24 V DC	1.75 A	



Measure



Control



Record



Analyze



Optimize



RISHABH

All specifications are subject to change without notice



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in

www.rishabh.co.in