



RISHABH

Data Sheet

RISHABH *iYoung*



Measure



Control



Record



Analyze



Optimize

- * Direct and alternating voltages from 100 μ V ... 600V
- * Direct and alternating currents from 10 μ A ... 10.00A
- * Resistance from 1 Ω ... 40.00M Ω with zero correction
- * Capacitance from 1pF ... 200.00 μ F with zero correction
- * Frequencies from 10.00Hz ... 500kHz
- * Diode measurement and continuity testing
- * Data Hold.
- * Relative measurement
- * Duty cycle (%) measurement
- * Non Contact Voltage Detection

Application

RISHABH iYoung is suited for universal, general applications in the electrical and electronics fields, as well as in radio and television service, training and education. It is of especially pocket size design and thus fit into pocket. The protective cover, which is provided as standard equipment, can be opened at an angle for convenient reading from the workbench, and provides for easy transport.

Hold:

By pressing the HOLD key, the currently displayed measurement value can be held and "HOLD" is simultaneously displayed.

Relative measurement (REL):

By pressing the REL key, the zero correction is made. All functions can do zero correction except Hz/Duty

Automatic / manual measuring range selection:

The measurement functions are chosen with the rotary selector Switch. The measuring range is automatically adjusted to the measurement value. The measuring range can also be manually selected with AUTO/MAN button.

Note : For Frequency (Hz) ,Duty cycle (%), and Capacitance (F) measuring range is AUTO. No Manual range selection is possible.

Hz/Duty:

The instrument can measure frequency (Hz) and duty cycle (%) of the Voltage by pressing Function (Yellow) key.

Non Contact Voltage Detection:

RISHABH iYoung allows you to detect the voltage presence in the live circuit without any electrical contact. NCV will be detected above 120V AC without safety cover.

Overload warning :

An acoustic signal occurs when measuring AC voltage >750V, DC Voltage >1000V, AC/DC mA current >400.0mA, AC/DC current >10.00A.

Energy saving circuit (Auto Power Off):

The instrument is switched off automatically, if none of the operating elements have been activated for about 15 minutes.

Protective cover for rough operating conditions:

A protective cover of Rubber Holster with a built-in stand protects the instrument against jolts and falls.

Diode and continuity testing:

This provides for the testing of the polarity of diodes, as well as inspection for short-circuits and circuit interruptions. In addition to the display, resistance of less than approx $60 \pm 5\Omega$ are indicated with an acoustic signal

Others:

It has provision of mounting clip for hands free operation in awkward situation .



Measure



Control



Record



Analyze



Optimize

Technical Specifications:

Reference conditions for Accuracy

Reference Temperature	23°C ± 2K
Relative Humidity	45%...55% RH
Waveform of measured quantity	Sinusoidal
Input frequency	50 Hz
Battery Voltage	3 V ± 0.1 V

Applicable regulations and standards


EMC Immunity	IEC 61326-1:2012, Table A.1 *
Immunity	IEC 61000-4-2 : 8 KV atmosphere discharge, 4 KV contact discharge IEC 61000-4-3 : 3 V/m
Safety	IEC 61010-1-2010
IP for water & dust	IEC 60529
Pollution degree:	2
High Voltage Test	3.6 kV

* Short-term measured value deviation may occur during electro-magnetic interference thus reducing the specified operating quality.


Environmental Conditions

Operating temperature	0 to +50°C
Storage temperature	- 25 to +70°C (without battery)
Relative humidity	45%.....75%
Terminal Protection	IP 52 for instrument and IP20 for terminals.
Altitude	Up to 2000 m

Battery

Battery Voltage	2 X 1.5 V Cells
Battery type	Alkaline manganese Dioxide cells.
Battery Life	Alkaline manganese dry cell: approx. 400 hours.
Battery test	Automatic display of  symbol when battery voltage drops below 2.4±0.1V

Influence Quantity

Influence Quantity	Range of Influence	Measured Quantity/ Measuring Range ¹⁾	Variation±(...%ofrdg.+digits)
Temperature	0°C +21°C and +25°C to 50°C		1.5×intrinsic error/10K
Relative humidity	75% 3 Days Meter off	V,A,Diode,F,HZ,%, OHM	1×intrinsic error
Frequency of Measured Quantity	20Hz.....<50Hz	400mV~,600V~	3.5+3
	>50Hz....500Hz		
	20Hz.....<50Hz	4V~,40V~,400V~	
	>50Hz....750Hz		
Battery Variation	Upto Low Battery 	V,A,Diode,HZ,%, OHM	20D
		F	70D



Measure



Control



Record



Analyze



Optimize

Technical Specifications:

Measurement Function	Measuring Range	Resolution	Input Impedance		Intrinsic Uncertainty under Reference Condition $\pm(\dots\%$ of the rdg.+...Digits)		Overload Capacity ¹⁾	
			DC	AC/ACDC	DC	AC	Value	Time
V	400.0mV	100 μ V ⁴⁾	>10M Ω		1+9	2+9 ⁴⁾	1050V	Continuous
	4.000V	1mV			1+9	1.5+9		
	40.00V	10mV			1+9	1.5+9		
	400.0V	100mV			1+9	1.5+9		
	600 V	1V			1+9	1.5+9		
			Voltage Drop.Approx					
mA	40.00mA	10 μ A	45mV		1.5+9	1.5+9	480mA	Continuous
	400.0mA	100 μ A	450mV		1.5+9	1.5+9		
A ⁷⁾	4.000A	1mA	45mV		2+5	2.5+9	12A:=30s	
	10.00A	10mA	120mV		2+5	2.5+9		
		Input	Input Impedance					
Ω	400 Ω	100m Ω	approx.0.45V		1+5		500V DC/ACrms	5min
	4.000k Ω	1 Ω			1+5			
	40.00k Ω	10 Ω			1+5			
	400.0k Ω	100 Ω			1.5+5			
	4.000M Ω	1k Ω			2+5			
	40M Ω	10k Ω			2.5+5			
Continuity	400.0 Ω	100m Ω			1.5+5			
Diode	1.0V	1mV	approx.1V		2.5+5			
F	5.000nF	1pF			5+40 ²⁾			
	50.00nF	10pF			3+10 ²⁾			
	500.0nF	100pF			1.5+10 ²⁾			
	5.000 μ F	1nF			2+10 ²⁾			
	50.00 μ F	10nF			2+10 ²⁾			
	200.0 μ F	100nF			5+40 ³⁾			
			f_{min}					
Hz ⁵⁾⁶⁾	9.999Hz	0.001Hz	9Hz		0.5+5	500V DC/ACrms	5min	
	99.99Hz	0.01Hz	9Hz					
	999.9Hz	0.1Hz	9Hz					
	9.999kHz	1Hz	9Hz					
	99.99kHz	10Hz	9Hz					
	500.0kHz	100Hz	9Hz					
Duty Cycle ⁵⁾⁶⁾	2...98%	0.10%			10Hz....1kHz \pm 5D 1kHz...10kHz \pm 5D/kHz			

1)At 0°C to 50°C

2)With Zero Adjustment "REL"

3)Time required for Measurement approx,60sec

4)Specified Accuracy is valid as of 5% of the measuring range for 400.0mVAC

5)For Hz & Duty Cycle measurement,select proper range for VAC function

6)At input \pm 5Vrms,SquareWave,Bipolar inputs.

7)10A Max 5 Minute



Measure



Control



Record



Analyze



Optimize

Technical Specifications:


Display

LCD display field (49.7mm x 23.9mm) with digital display & display of unit of measure, current type & various special functions.

Digital

Display	7 segment
Character height	Main Display Character : 12.9mm
Number of digits/Counts	3 ¾ digits 3999 steps
Overrange display	“OL” is displayed.
Polarity display	“-” sign is displayed when positive pole at “⊥”
Sampling rate	3 measurements/s for V, I, Ω, Capacitance, Frequency and Duty cycle measurement

Analog

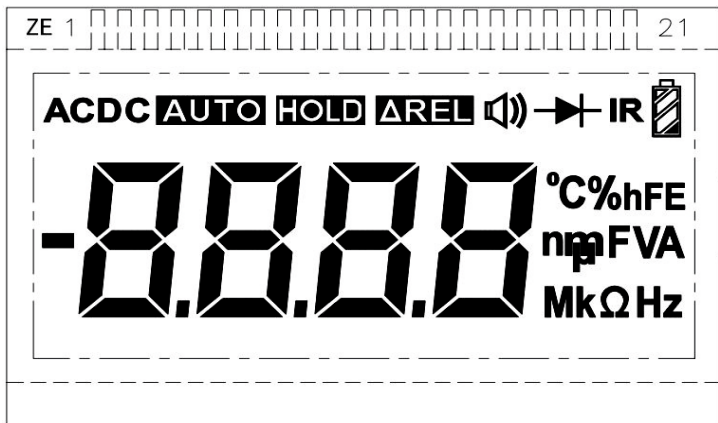

1. Digital display with dot and polarity.
2. Low Battery Indication.
3. Display for REL and HOLD.
4. Continuity test display: Buzzer symbol appears on screen.
5. Display for diode measurement.
6. Measurement unit display.
7. Display for automatic measuring range selection.
8. Display for selected type of Voltage/Current (AC or DC).
9. Display for overload value “OL”.

Fuse

Fuse for ranges up to 400 mA	400 mA / 250V; 5 mm x 25 mm
Fuse for 10 A range	12.5 A / 250V; 5 mm x 25 mm

Mechanical Design

Protection	Instruments: IP 52 Connector sockets: IP 20
Dimensions	W x H x D:
With Holster	74.3 mm x 154.1 mm x 47.6 mm
Without Holster	68.3 mm x 142.9 mm x 39.3 mm
Weight	Approx. 0.350 Kg with battery

Standard Scope Of Supply

- 1 Multimeter
- 1 Cable set
- 1 Copy Operating instructions
- 1 Protective Case (Holster).



Measure



Control



Record



Analyze



Optimize



RISHABH



Measure



Control



Record



Analyze



Optimize

RISHABH INSTRUMENTS LIMITED

Domestic (India): +91 253 2202099 | marketing@rishabh.co.in
International: +91 253 2202004/06/08/99 | global@rishabh.co.in
www.rishabh.co.in